


BU
AF-4561/10

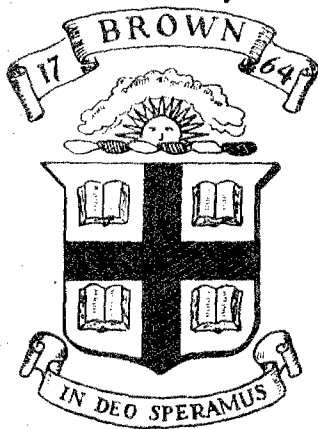

Division of Engineering
BROWN UNIVERSITY
PROVIDENCE, R. I.

AFRL 515

DIELECTRIC COATED ANTENNA

BY

SAID KOOZEKANANI

TECHNICAL LIBRARY
U S ARMY ORDNANCE
ABERDEEN PROVING GROUND, MD.
ORDBG-TL

COATED IN

Air Force Cambridge Research Laboratories
Office of Aerospace Research
Contract AF 19(604)-4561
Scientific Report AF 4561/10

AD 261936

June 1961

BU
AF-4561/10

AFGRL 515

DIELECTRIC COATED ANTENNA

By

Said Koozekanani

Scientific Report AF 4561/10

DIVISION OF ENGINEERING

BROWN UNIVERSITY

PROVIDENCE, RHODE ISLAND

May 1961

Contract Monitor: Dr. Werner W. Gerbes

"The research reported in this document has been sponsored in part by the Electronics Research Directorate of the Air Force Cambridge Research Laboratories, Office of Aerospace Research, and by the Office of Naval Research and the David Taylor Model Basin. The publication of this report does not necessarily constitute approval by the Air Force of the findings or conclusions contained herein."

Contract title: Research Directed toward the study of Radiation of Electromagnetic Waves

Contract number: AF 19(604)-4561

Best Available Copy

TECHNICAL LIBRARY
U S ARMY ORDNANCE
ABERDEEN PROVING GROUND, MD.
ORDBG-TL

"Requests for additional copies by Agencies of the Department of Defense, their contractors, and other Government agencies should be directed to the:

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA"

"All other persons and organizations should apply to the:

U. S. DEPARTMENT OF COMMERCE
OFFICE OF TECHNICAL SERVICES
WASHINGTON 25, D.C."

20060223386

AF-4561/10

TECHNICAL LIBRARY
U S ARMY ORDNANCE
ABERDEEN PROVING GROUND, MD.
ORDBG-TL

TABLE OF CONTENTS

	<u>Page No.</u>
Acknowledgment	i
Abstract	ii
Introduction	1
I. General Discussion	3
II. Potential Function for Region 1	6
III. Potential Function for Region 2	8
IV. Potential Function for Region 3	12
V. The Continuity Conditions	13
VI. Surface Waves and the Radiation Field	21
A. Significance of Poles of Integrand	22
B. Position of Poles	23
C. Physical Consequence of the Poles of Region (iii)	26
D. The Branch Points	27
E. The Path of Integration	27
VII. The Radiation Pattern	29
VIII. Efficiency	32
IX. Admittance	37
Appendix (i) Convergence of the Integral C_{mn}	39
Appendix (ii) The Solution of the Infinite Set of Equations	41
Appendix (iii) An Alternative Method to obtain b_n and $\xi(\lambda)$.	43
Appendix (iv) Solution of the Problem in the Absence of Dielectric	45
Appendix (v) Nonexistence of Coaxial Modes in Region (2)	47
Appendix (vi) Calculation for Y/Y_0	48
References	50

Acknowledgment

The author wishes to express his thanks to Professors V. M. Papadopoulos and R. D. Kodis who were his advisers during the research leading to this paper. He is indebted to both for helpful suggestions and counseling.

ABSTRACT

Propagation of electromagnetic waves in a coaxial system is investigated. The configuration is that of an idealized dielectric coated antenna standing perpendicularly on a perfectly conducting plane being fed coaxially at its base. The method used involves integral transforms and leads to an infinite set of simultaneous linear equations relating an infinite number of unknowns. By proper choice of transverse dimensions only a finite number of equations and unknowns need be considered. It is therefore possible to obtain expressions for the amplitude of the surface wave and the admittance of the antenna.

INTRODUCTION

The purpose of this paper is to solve a boundary value problem related to wave propagation in a coaxial system. The system consists of a dielectric-covered cylindrical conductor protruding from an infinite flange and extending to infinity. The center conductor and its dielectric shell are extensions of a coaxial transmission line which is terminated at the flange. The surfaces of the flange, the coaxial line and the center conductor are assumed to be perfectly conducting. This problem is the idealization of an antenna problem in which a vertical dielectric-coated cylinder, standing on a horizontal, perfectly conducting ground is fed by a coaxial line.

A general solution for this boundary value problem is found in terms of an infinite number of linear equations with an infinite number of unknowns. These unknowns are related to the scattering coefficients at the end of the transmission line. The solution is obtained by generalizing the method used by N. V. Zernov to solve the problem of radiation of electromagnetic waves from a circular wave guide [1]. The field components are found in terms of an infinite series whose coefficients are determined by solving the infinite set of linear equations. However by a suitable choice of the transverse dimensions of the line, the infinite set may be approximated by just one equation. From this equation one can find the reflection and transmission coefficients of the dominant mode of the transmission line.

The geometry of the problem suggests that a surface wave of the Sommerfeld-Goubau type will propagate along the semi-infinite dielectric-coated conductor in the half-space. Expressions are found for the amplitude of the surface wave, the radiated energy at great distances, the coefficient of reflection and the ratio of energy carried by the surface wave to the total energy delivered by the line.

The final expression for the ratio of energy in the surface wave to the input energy can be employed in choosing the dimensions of the system so that the dielectric-coated rod will transfer energy efficiently. Such information can be useful in the design of television systems or high frequency links [2].

Problems similar to this one have been treated by Papadopoulos [3], Schelkunoff [4] and Zernov [1]. This particular problem is an extension of work done by Papadopoulos, the difference lying in the addition of the dielectric coating.

I. GENERAL DISCUSSION

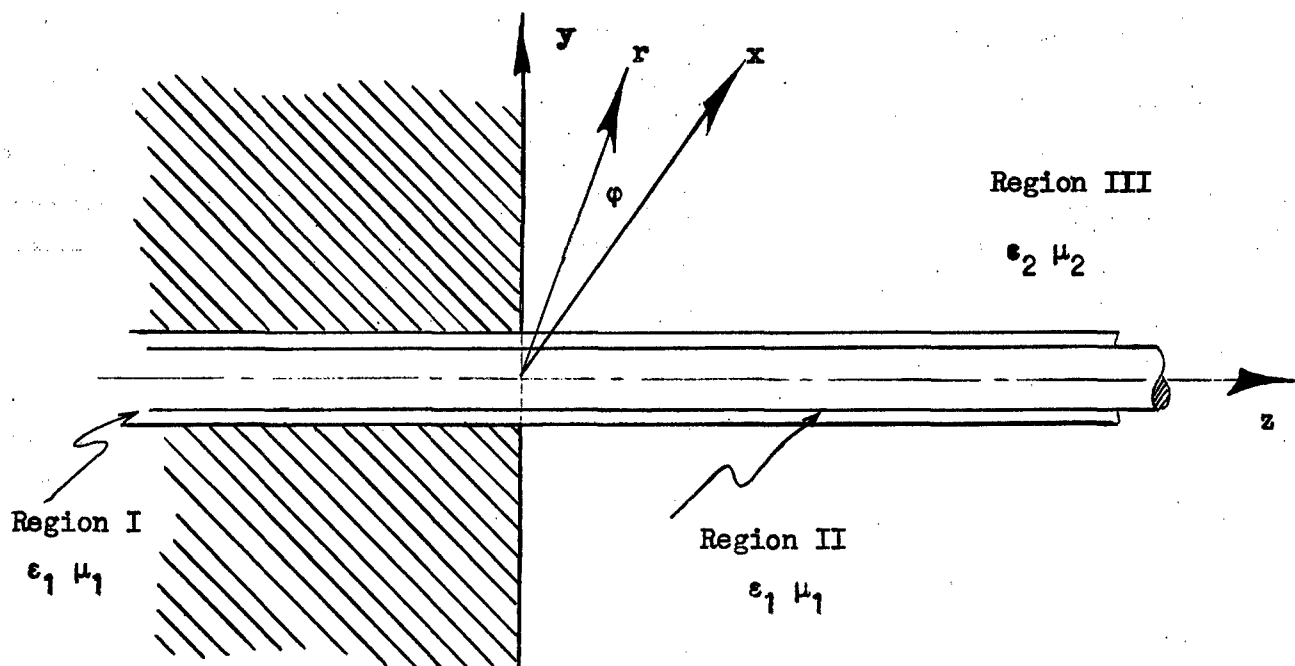


Fig. (1)

In the problem to be considered cylindrical coordinates (r, ϕ, z) will be used, as shown in Fig. 1. An infinitely long, conducting cylinder of radius b , covered by a lossless coating of radius a ($a > b$) with dielectric constant ϵ_1 and permeability μ_1 is placed coaxially in the region $-\infty < z \leq 0$ within a circular pipe of radius a , and extends to infinity in the half space $z \geq 0$. The plane $z = 0$ terminates the circular guide and is perfectly conducting in the region $r \geq a$. A symmetrical transverse electro-magnetic wave (TEM) is assumed to propagate within the guide with a time dependence of the form $\exp(-i\omega t)$. The azimuthal angular dependence of the field is taken to be zero; i.e. $\partial/\partial\phi = 0$. The field components H_r , H_z and E_ϕ are therefore null.

Since the longitudinal component of the magnetic field is zero and since the medium is isotropic and homogeneous, the entire field can be derived from a scalar wave function Ψ ; or in this case from the axial component of the

electric Hertz vector [5]. The field components of these symmetrical modes are given by the following relations:

$$E_z = \frac{\partial^2 \psi}{\partial z^2} + k^2 \psi, \quad (1)$$

$$E_r = \frac{\partial^2 \psi}{\partial z \partial r}, \quad (2)$$

$$H_\phi = i\omega\epsilon \frac{\partial \psi}{\partial r}. \quad (3)$$

The function ψ satisfies the wave equation,

$$\left(\frac{1}{r} \frac{\partial}{\partial r} r \frac{\partial}{\partial r} + \frac{\partial^2}{\partial z^2} + k^2 \right) \psi = 0, \quad (4)$$

subject to appropriate boundary conditions.

To solve the problem we consider three distinct regions as shown in Fig. 1, namely:

Region 1, $b \leq r \leq a$, $-\infty < z \leq 0$

Region 2, $b \leq r \leq a$, $0 \leq z < \infty$;

Region 3, $a \leq r < \infty$, $0 \leq z < \infty$.

Potential functions are obtained by finding the solution of (4) appropriate to each of the above three regions and satisfying the necessary boundary and continuity conditions. The boundary conditions which ψ must satisfy are:

$$\frac{\partial^2 \psi_1}{\partial z^2} + k_1^2 \psi_1 = 0 \quad \text{at } r=b, r=a, z \leq 0 \quad \text{Reg. 1;}$$

$$\frac{\partial^2 \psi_2}{\partial z^2} + k_1^2 \psi_2 = 0 \quad \text{at } r=b, z \geq 0 \quad \text{Reg. 2;}$$

$$\frac{\partial^2 \psi}{\partial z \partial r} = 0 \quad \text{at } z = 0 \quad r > a \quad \text{Reg. 3.}$$

The continuity conditions are:

$$\epsilon_1 E_{z1} = \epsilon_1 E_{z2}, \quad H_{\phi 1} = H_{\phi 2} \quad \text{and} \quad E_{r1} = E_{r2}$$

at the boundary between regions 1 and 2;

$$E_{z2} = E_{z3}, \quad H_{\phi 2} = H_{\phi 3} \quad \text{and} \quad \epsilon_1 E_{r2} = \epsilon_2 E_{r3}$$

at the boundary between regions 2 and 3.

II. POTENTIAL FUNCTION FOR REGION 1.

The solution of (4) in region 1 which satisfies the required boundary conditions has the form [6],

$$\psi_1 = \varphi_{00} e^{i\gamma_0 z} + \sum_{n=0}^{\infty} a_n \varphi_{0n}(\alpha_n r) e^{-i\gamma_n z}, \quad (5)$$

where $\varphi_{0n}(\alpha_n r) = J_0(\alpha_n r) Y_0(\alpha_n b) - J_0(\alpha_n b) Y_0(\alpha_n r)$, (6)

and $\varphi_{00} = \log_e r$. The constant γ_n is the propagation constant of the n-th mode, a_n is the amplitude coefficient of the n-th mode, and $\alpha = \alpha_n$ is the n-th positive zero in order of magnitude of the function,

$$J_0(\alpha a) Y_0(\alpha b) - J_0(\alpha b) Y_0(\alpha a) = 0. \quad (7)$$

The potential function ψ_1 is made up of a forward going TEM wave of amplitude one, a reflected TEM wave and an infinite number of circularly symmetric transverse magnetic modes which propagate in the back-ward direction and form the scattered field. Each of these modes satisfies the required boundary conditions. Their collective presence is necessary to satisfy the required continuity conditions at $z = 0$. By symmetry the TEM mode excites only those higher modes which have no ϕ dependence.

If we substitute ψ_1 in (4), the following relations between the constants α_n and the propagation constant γ_n are found to hold:

$$\gamma_n = \sqrt{k_1^2 - \alpha_n^2} \quad ;$$

$$\gamma_0 = k_1, \alpha_0 = 0 \quad .$$

We take that branch of the square root for which $0 \leq \arg \gamma_n \leq \pi^*$ for $n > 0$, and with the appropriate coax geometry we can assure that $R_e k_1 < \alpha_n$ for $n \geq 1$.

This choice allows the dominant mode which has zero cut off frequency to propagate; all other modes are cut off and decay exponentially at a rate that increases with n . For large values of n the propagation constant γ_n of the n -th mode can be accurately approximated by,

$$\gamma_n^2 \approx k_1^2 - \frac{n^2 \pi^2}{(a-b)^2} \quad . \quad (9)$$

For $n \geq 1$, γ_n^2 is a negative number.

*The choice is made so that the radiation condition at $-\infty$ will hold. For the n -th mode $\phi_{on} e^{-i\gamma_n z} = \phi_{on} \exp[-iz(R_e \gamma_n + iI_m \gamma_n)] = \phi_{on} \exp[zI_m \gamma_n - izR_e \gamma_n]$ if $I_m \gamma_n > 0$ $\phi_{on} \exp(-i\gamma_n z) \rightarrow 0$ as $z \rightarrow -\infty$.

III. POTENTIAL FUNCTION FOR REGION 2.

To find the potential function for region 2 of dielectric constant ϵ_1 and permeability μ_1 , we use the Fourier integral cosine transform pair which is usually written in the form,

$$S(\lambda, r) = \int_0^{\infty} \psi(r, z) \cos \lambda z dz, \quad (10)$$

and

$$\psi(r, z) = \frac{2}{\pi} \int_0^{\infty} S(\lambda, r) \cos \lambda z d\lambda. \quad (11)$$

If we multiply (4) by $\cos \lambda z dz$ and integrate between zero and infinity, we obtain the following result:

$$\left(\frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} + k_1^2 - \lambda^2 \right) S(\lambda, r) = \frac{\partial \psi}{\partial z} \Big|_{z=0}; \quad b \leq r \leq a. \quad (12)$$

Representing the differential operator in (12) by L we have,

$$L S(\lambda, r) = \frac{\partial \psi}{\partial z} \Big|_{z=0}. \quad (13)$$

The solution of (13), involving the Hermitian operator L , can be represented by,

$$S(\lambda, r) = f(\lambda, r) + g(\lambda, r), \quad (14)$$

where f is the inhomogeneous solution and g is the homogeneous solution (i.e. $Lg = 0$).

In region 2, the functions $\phi_{0i}(\lambda_i r)$, $i = 1, 2, 3, \dots$ are the eigen vectors of the differential operator L with eigen values λ_i ($\lambda_i \neq \lambda_j$, for $j \neq i$) and form a denumerably infinite dimensional orthogonal basis. Any

function in this space can be uniquely represented in terms of its components along this orthogonal system. We can therefore express the inhomogeneous solution f

$$f = \sum_{i=0}^{\infty} f_i \varphi_{oi}(a_i r) . \quad (15)$$

Let,

$$\left. \frac{\partial \psi}{\partial z} \right|_{z=0} = \sum_0^{\infty} g_i \varphi_{oi}(a_i r) , \quad (16)$$

where $f_i = \frac{(f, \varphi_{oi})}{(\varphi_{oi}, \varphi_{oi})}$, $g_i = \frac{(\partial_z \psi|_{z=0}, \varphi_{oi})}{(\varphi_{oi}, \varphi_{oi})}$ and the bracket

notation is defined by $(p, q) = \int_b^a r p q dr$. Substituting for f and

$\left. \frac{d\psi}{dz} \right|_{z=0}$ from (15) and (16) in (13), we find that,

$$\sum_0^{\infty} f_i \lambda_i \varphi_{oi} = \sum_{i=0}^{\infty} g_i \varphi_{oi} . \quad (17)$$

From (17) we have $f_i = \frac{g_i}{\lambda_i}$ and hence,

$$f = \sum_{i=0}^{\infty} \frac{g_i}{\lambda_i} \varphi_{oi}(a_i r) . \quad (18)$$

The eigenvalues λ_i can be found by direct substitution of $\varphi_{oi}(a_i r)$ in (12),

$\lambda_i = r_i^2 - \lambda^2$. Substituting for λ_i in (18), we get:

$$f = \sum_{i=0}^{\infty} \frac{g_i}{r_i^2 - \lambda^2} \varphi_{oi}(a_i r) . \quad (19)$$

If we substitute (19) in (14) and take the inverse Fourier transform we get,

$$\psi_2 = \frac{2}{\pi} \sum_{i=0}^{\infty} \int_0^{\infty} \frac{g_i}{\gamma_i^2 - \lambda^2} \varphi_{oi}(a_{ir}) \cos \lambda z d\lambda + \frac{2}{\pi} \int_0^{\infty} g(\lambda, r) \cos \lambda z d\lambda,$$

or after integration,

$$\psi_2 = \sum_{i=0}^{\infty} b_i \varphi_{oi}(a_{ir}) e^{i\gamma_i z} + \int_0^{\infty} G(\lambda, r) \cos \lambda z d\lambda, \quad (20)$$

where the constant $\frac{2}{\pi}$ has been absorbed by the unknown functions, b_i and $G(\lambda, r)$ ($G(\lambda, r) = \frac{2}{\pi} g$). It should be noticed that the unknown homogeneous solution $g(\lambda, r)$ is nondenumerably infinite or $g(\lambda, r)$ is a continuous function while the $b_i - s$ are countable.

The homogeneous solution $G(\lambda, r)$ is chosen as follows,

$$G(\lambda, r) = \frac{\Delta_1(k_1' r)}{\Delta_1(k_1' a)} \frac{\xi(\lambda)}{k_1'^2 - \lambda^2}, \quad (20a)$$

where

$$\Delta_1(k_1' r) = J_0(k_1' r) Y_0(k_1' b) - J_0(k_1' b) Y_0(k_1' r), \quad (21)$$

and $k_1' = \sqrt{k_1^2 - \lambda^2}$ with $0 \leq \arg \sqrt{k_1^2 - \lambda^2} \leq \pi$.

The choice for $G(\lambda, r)$ in (20)a is made to facilitate the matching of the boundary conditions.

In region 2, coaxial modes of the type $\varphi_{oi} e^{i\gamma_i z}$ cannot exist, so the residues of the integral in the complex λ -plane of (20) must cancel all such modes, and it will later on be shown that such modes are cancelled. ψ_2 satisfies the boundary condition at $r=b, z>0$ and the integral converges uniformly for

large λ if $\xi(\lambda)$ is well behaved. We will see in sec. V that $\xi(\lambda)$ in fact behaves nicely when λ is greater than a constant λ' and converges uniformly to zero as $O(\lambda^{-2})$ when $\lambda \rightarrow \infty$.

IV. POTENTIAL FUNCTION FOR REGION 3:

For region 3 of dielectric constant ϵ_2 and permeability μ_2 , following a line of argument similar to that of ψ_2 , we can get ψ_3 in terms of an integral function, i.e.

$$\psi_3 = \int_0^\infty F(\lambda, r) \cos \lambda z d\lambda, \quad (22)$$

$$\text{where } F(\lambda, r) = \zeta(\lambda) \frac{H_0^{(1)}(k_2' r)}{H_0^{(1)}(k_2' a)} \times \frac{1}{k_2^2 - \lambda^2} \text{ and } k_2' = \sqrt{k_2^2 - \lambda^2}.$$

We take again that branch of the square root for which $0 \leq \arg(\sqrt{k_2^2 - \lambda^2}) \leq \pi$, and to satisfy the radiation condition at infinity we assume the free space propagation constant k_2 to be $k_2 = R_e k_2 + i\delta$ where δ is a small positive real number. $F(\lambda, r)$ is associated with the cosine Fourier transform of ψ_3 . ψ_3 satisfies the boundary condition at $z=0, r \geq a$ and the radiation condition at infinity. At large distances ψ_3 behaves as,

$$\psi_3 \approx \int_0^\infty d\lambda f(\lambda) e^{iR} [\sqrt{k_2^2 - \lambda^2} \cos \theta + \sin \theta], \quad (23)$$

where θ is the polar angle and $R^2 = z^2 + r^2$.

V. THE CONTINUITY CONDITIONS

The continuity of the tangential and normal components of electric and magnetic fields across the boundaries of the three regions give the following relations:

$$\frac{\partial^2 \psi_3}{\partial z^2} + k_1^2 \psi_3 = \frac{\partial^2 \psi_2}{\partial z^2} + k_2^2 \psi_2, \quad r=a, 0 \leq z < \infty; \quad (24)$$

$$\epsilon_1 \frac{\partial^2 \psi_2}{\partial z \partial r} = \epsilon_2 \frac{\partial^2 \psi_3}{\partial z \partial r}, \quad r=a, 0 \leq z < \infty; \quad (25)$$

$$i\omega \epsilon_1 \frac{\partial \psi_2}{\partial r} = i\omega \epsilon_2 \frac{\partial \psi_3}{\partial r}, \quad r=a, 0 \leq z < \infty; \quad (26)$$

$$\frac{\partial^2 \psi_1}{\partial z \partial r} = \frac{\partial^2 \psi_2}{\partial r \partial z}, \quad b \leq r \leq a, z=0; \quad (27)$$

$$\epsilon_1 \frac{\partial^2 \psi_1}{\partial z^2} + \epsilon_1 k_1^2 \psi_1 = \epsilon_1 \frac{\partial^2 \psi_2}{\partial z^2} + \epsilon_1 k_1^2 \psi_2, \quad b \leq r < a, z=0; \quad (28)$$

and

$$i\omega \epsilon_1 \frac{\partial \psi_1}{\partial r} = i\omega \epsilon_2 \frac{\partial \psi_2}{\partial r}, \quad b \leq r \leq a, z=0. \quad (29)$$

In equations (5), (20) and (22) for ψ, ψ_2 and ψ_3 there are four sets of unknowns, namely the $b_n, a_n, \xi(\lambda)$ and $\zeta(\lambda)$. The unknowns can be found from four of the six continuity conditions given above, since two of them are not independent. For example (25) is a consequence of (24) and (26); similarly (28)

follows from (27) and (29). The four unknowns are therefore uniquely determined by conditions (24), (26), (28) and (29).

The functions $\xi(\lambda)$ and $\zeta(\lambda)$ are determined by substitution of ψ_3 and ψ_2 in (24) and (26).

The first gives,

$$\int_0^\infty \xi(\lambda) \cos \lambda z d\lambda = \int_0^\infty \zeta(\lambda) \cos \lambda z d\lambda,$$

and thus,

$$\xi(\lambda) = \zeta(\lambda). \quad (30)$$

Substituting the above relation in (26), we obtain,

$$\epsilon_1 \frac{b_0}{a} e^{i\gamma_0 z} + \epsilon_1 \sum_{n=1}^{\infty} b_n \alpha_n \varphi'_{on}(\alpha_n a) e^{i\gamma_n z} + \quad (31)$$

$$\epsilon_1 \int_0^\infty \frac{\Delta_2(k'_1 a)}{\Delta_1(k'_1 a)} - \frac{\xi(\lambda) \cos \lambda z}{k'_1} d\lambda = -\epsilon_2 \int_0^\infty \xi(\lambda) \frac{H_1^{(1)}(k'_2 a)}{H_0^{(1)}(k'_2 a)} \frac{\cos \lambda z}{k'_2} d\lambda,$$

where $k'_2 = \sqrt{k_2^2 - \lambda^2}$,

$$-\Delta_2(k'_1 a) = -J_1(k'_1 a) Y_0(k'_1 b) + J_0(k'_1 b) Y_1(k'_1 a)$$

and $\Delta_1(k'_1 a)$ has already been defined by (21); the prime in the expression $\varphi'_{on}(\alpha_n a)$ denotes differentiation with respect to the argument. Equation (31) can further be simplified by making use of the Wronskian relation, which for

the pair $J_0(\alpha_n r)$ and $Y_0(\alpha_n r)$ is,

$$J_1(\alpha_n r) Y_0(\alpha_n r) - J_0(\alpha_n r) Y_1(\alpha_n r) = \frac{2}{\pi \alpha_n r}. \quad (32)$$

With the help of (32) and (7) we can write $\phi'_{on}(\alpha_n r)$ in its equivalent form,

$$\begin{aligned} -\phi'_{on}(\alpha_n r) &= J_1(\alpha_n a) Y_0(\alpha_n a) - Y_1(\alpha_n a) J_0(\alpha_n a), \\ &= (J_1(\alpha_n a) Y_0(\alpha_n a) - J_0(\alpha_n a) Y_1(\alpha_n a)) \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)}, \\ &= \frac{2}{\pi \alpha_n a} \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)}. \end{aligned}$$

Making use of the above expression and rearranging (31), we get,

$$\frac{b_0}{a} e^{i\gamma_0 z} - \frac{2}{\pi a} \sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} e^{i\gamma_n z} = \quad (33)$$

$$- \int_0^{\infty} \xi(\lambda) \left[\frac{\epsilon_2}{\epsilon_1 k_2} \frac{H_1^{(1)}(k_2' a)}{H_0^{(1)}(k_2' a)} - \frac{1}{k_1} \frac{\Delta_2(k_1' a)}{\Delta_1(k_1' a)} \right] \cos \lambda z d\lambda.$$

The argument of the integral in (33) is the cosine Fourier integral transform of the left hand side. Using (11), we obtain,

$$\begin{aligned} \left[\frac{\epsilon_2}{\epsilon_1 k_2} \frac{H_1^{(1)}(k_2' a)}{H_0^{(1)}(k_2' a)} - \frac{1}{k_1} \frac{\Delta_2(k_1' a)}{\Delta_1(k_1' a)} \right] \xi(\lambda) = \\ \frac{2}{\pi} \int_0^{\infty} \left(\frac{b_0}{a} e^{i\gamma_0 z} - \frac{2}{\pi a} \sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} e^{i\gamma_n z} \right) \cos \lambda z d\lambda, \end{aligned}$$

and after simplification the resulting equation for $\xi(\lambda)$ is,

$$\xi(\lambda) = \frac{4i\epsilon}{a\pi^2} \frac{\sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda^2} - \frac{\pi}{2} \frac{\gamma_0 b_0}{\gamma_0^2 - \lambda^2}}{\frac{\epsilon_2 H_1^{(1)}(k_2' a)}{k_2 H_0^{(1)}(k_2' a)} - \frac{\epsilon_1}{k_1} \frac{\Delta_2(k_1' a)}{\Delta_1(k_1' a)}} \quad (34)$$

Equation (34) gives $\xi(\lambda)$ in terms of the unknowns b_n ; to find the b_n , we shall make use of the continuity conditions (27) and (29) between ψ_1 and ψ_3 at $z=0$. From (27),

$$(1-a_0-b_0) \frac{b_0}{r} - \sum_{n=1}^{\infty} a_n \gamma_n (a_n + b_n) \varphi'_{on}(\alpha_n r) = 0, \quad (35)$$

where again prime indicates differentiation with respect to the argument of the cylindrical functions. Equating the coefficients of the independent functions $\varphi'_{on}(\alpha_n r)$ to zero, we get,

$$-a_n + \delta_{no} = b_n, \quad (36)$$

where δ_{no} is the Kroneker delta symbol having the following property:

$$\delta_{mn} = \begin{cases} 0 & \text{for } m \neq n, \\ 1 & \text{for } m = n. \end{cases}$$

Similarly, substitution of ψ_1 and ψ_2 from (5) and (20) in to relation (29) results in,

$$\frac{1}{r} + \frac{a_0}{r} + \sum_{n=1}^{\infty} a_n \alpha_n \varphi'_{on}(\alpha_n r) = \frac{b_0}{r} + \sum_{n=1}^{\infty} b_n \alpha_n \varphi'_{on}(\alpha_n r) - \int_0^{\infty} \frac{\Delta_2(k'_1 r)}{\Delta_1(k'_1 a)} \frac{\xi(\lambda)}{k'_1} d\lambda \quad (37)$$

Eliminating the a_n by means of (36) we obtain

$$\int_0^{\infty} \frac{\Delta_2(k'_1 r) \xi(\lambda)}{\Delta_1(k'_1 r) k'_1} d\lambda = 2(1-b_0) \frac{1}{r} - \sum_{n=1}^{\infty} b_n \alpha_n \varphi'_{on}(\alpha_n r) \quad (38)$$

Equation (38) has the form of an expansion in terms of the orthogonal cylindrical harmonics $\varphi'_{on}(\alpha_n r)$ where,

$$\varphi'_{on}(\alpha_n r) = -J_1(\alpha_n r) Y_0(\alpha_n b) + J_0(\alpha_n b) Y_1(\alpha_n r), \quad n \neq 0 \quad (39)$$

and

$$\varphi'_{00} = \frac{1}{r}, \quad \alpha_0 = 0.$$

If we multiply (38) by $r \varphi'_{on}(\alpha_n r) dr$ and make use of the orthogonality relations, assuming that changing the order of integration and summation is permissible, we shall have an infinite set of linear equations for b_n . Following the above discussions, we get,

$$\int_0^{\infty} \frac{\xi(\lambda)}{k'_1 \Delta_1(k'_1 a)} T_j(\lambda) d\lambda = 2(1-b_0) I_{0j} - \sum_{n=1}^{\infty} b_n \alpha_n I_{nj}, \quad (40)$$

where $T_j(\lambda) = \int_b^a r \Delta_2(k_2' r) \phi_{oj}(\alpha_j r) dr$,

and $I_{jn} = \int_b^a r \phi_{oj}(\alpha_j r) \phi_{on}(\alpha_n r) dr$.

After simplification these integrals reduce to,

$$T_j(\lambda) = \begin{cases} -\frac{2 k_1'}{k_1'^2 - \alpha_j^2} \frac{1}{\alpha_j \pi} \frac{J_o(\alpha_j b)}{J_o(\alpha_j a)} \Delta_1(k_1' a), & j \neq 0, \\ \frac{\Delta_2(k_1' a)}{k_1'}, & j = 0, \end{cases} \quad (41)$$

and

$$I_{jn} = \begin{cases} 0, & j \neq n; \\ \frac{2}{\pi^2 \alpha_n^2} \left[\left(\frac{J_o(\alpha_n b)}{J_o(\alpha_n a)} \right)^2 - 1 \right], & j = n \neq 0, \\ \log \frac{a}{eb}, & j = n = 0. \end{cases} \quad (42)$$

Substituting I_{nj} , T_j and $\xi(\lambda)$ in (40) gives the linear set of equations for b_n , i.e.

$$b_o = 1 + \frac{i b_o \gamma_o c_{oo}}{\pi a \log \frac{a}{b}} - \frac{2i}{\pi^2 a \log \frac{a}{b}} \sum_{n=1}^{\infty} b_n \gamma_n \frac{J_o(\alpha_n b)}{J_o(\alpha_n a)} c_{on}, \quad (43)$$

$$b_n = \frac{2i}{\pi^2 \alpha_n^2 I_{nn}} \left(-b_o \gamma_o c_{no} + \frac{2}{\pi} \sum_{m=1}^{\infty} b_m \gamma_m \frac{J_o(\alpha_m b)}{J_o(\alpha_m a)} c_{nm} \right) \frac{J_o(\alpha_n b)}{J_o(\alpha_n a)} \quad (44)$$

where,

$$c_{mn} = \int_0^\infty \frac{d\lambda}{(\gamma_n^2 - \lambda^2)(\gamma_m^2 - \lambda^2)} \times \left(\frac{\epsilon_1}{\frac{\epsilon_2 H_1^{(1)}(k_2' a)}{k_2 H_0^{(1)}(k_2' a)} - \frac{\epsilon_1}{k_1} \frac{\Delta_2(k_1' a)}{\Delta_1(k_1' a)}} \right) \quad (45)$$

If the coefficients of the unknowns in the linear set of equations (43), (44) are made small the infinite set may be approximated by a finite set and b_0 the transmission coefficient can be found accurately.* The coefficients include the integral expression c_{mn} which is bounded and whose integrand converges as $O(\lambda^{-3})$ for $\lambda \gg 1$.

If in (45) we substitute ρ for b/a , σ for $k_1 a = a/\lambda^\dagger$ and $\beta = k_2/k_1$, the integrand can be made non-dimensional. It can be shown** that when $\epsilon = \frac{a-b}{\lambda} = (1-\rho)\sigma$ approaches zero, occurring when $\rho \rightarrow 1$ and $\sigma \neq 0$, c_{mn} is of the following order:

$$c_{mn} \rightarrow O(\epsilon^5), \quad m, n \neq 0;$$

$$c_{om} = c_{mo} \rightarrow O(\epsilon^3), \quad m \neq 0;$$

$$c_{oo} \rightarrow O(\epsilon).$$

For the case when $\sigma \rightarrow 0$ and $\rho \neq 1$,

$$c_{mn} \rightarrow O(\epsilon^3), \text{ for all } m \text{ and } n.$$

*Appendix (i)

$\dagger \lambda = \text{wavelength}/2\pi$

**Appendix (ii)

Consider the case when $\rho \rightarrow 1$, $\sigma = 0$, and let $\varepsilon \rightarrow 0$.

If we neglect all b_n for $n \geq 1$ the coefficients of reflection and transmission become:

$$b_0 = \frac{1}{1 - \beta_0} , \quad (46)$$

and

$$a_0 = \frac{\beta_0}{\beta_0 - 1} , \quad (47)$$

where

$$\beta_0 = \frac{i r_0 c_{00}}{\pi a \log \frac{a}{b}} .$$

If we take one more term and neglect b_n for $n \geq 2$, we obtain,

$$b_0 = \frac{1}{1 - \beta_0} \left(1 - \frac{O(\varepsilon^2)}{1 - \beta_0} \right) , \quad (48)$$

and

$$b_1 = O(\varepsilon) b_0 .$$

Continuing in this manner we see that the inclusion of higher members of the sequence b_n has little effect upon b_0 .

VI. SURFACE WAVES AND THE RADIATION FIELD.

The potential function ψ_3 can now be put in its final form by substituting in (22) $\zeta(\lambda)$ from (30) and (34). Thus we obtain,

$$\psi_3 = \frac{4i\epsilon_1}{a\pi^2} \int_0^\infty d\lambda \frac{H_0^{(1)}(k_2' r)}{H_0^{(1)}(k_2' a)} \frac{\cos \lambda z}{k^2 - \lambda^2} \frac{1}{I(\lambda)} \times \left[\sum_{n=1}^\infty b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda^2} - \frac{\pi}{2} \frac{b_0 \gamma_0}{\gamma_0^2 - \lambda^2} \right], \quad (49)$$

where

$$I(\lambda) = \frac{\epsilon_2}{k_2} \frac{H_1^{(1)}(k_2' a)}{H_0^{(1)}(k_2' a)} - \frac{\epsilon_1}{k_1} \frac{\Delta_2(k_1' a)}{\Delta_1(k_1' a)}. \quad (50)$$

Since the integrand of (49) is an even function of λ , we can represent $\cos \lambda z$ by its exponential form and combine the two terms into a single integral from $-\infty$ to $+\infty$. The resulting integral may be simplified by substituting non-dimensional quantities ρ, σ and β for $b/a, k_1 a$, and k_2/k_1 in the integrand. As the result of the above manipulations we obtain,

$$\psi_3 = \int_{-\infty}^\infty \frac{H_0^{(1)}(\frac{v r}{a})}{H_0^{(1)}(v)} \frac{e^{ix \frac{z}{a}}}{v} \frac{dx}{I(u_1 v)} \times \left[\frac{2ia}{\pi^2} \sum_{n=1}^\infty b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - x^2} - \frac{b_0}{\pi} \frac{\sigma}{\sigma^2 - x^2} \right], \quad (51)$$

where

$$I(u, v) = \frac{\beta^2 H_1^{(1)}(v)}{v H_0^{(1)}(v)} - \frac{1}{u} \frac{\delta_1(u)}{\delta_0(u)}, \quad (52)$$

$$\delta_1(u) = J_1(u) Y_0(\rho u) - J_0(\rho u) Y_1(u) ,$$

$$\delta_0(u) = J_0(u) Y_0(\rho u) - J_0(\rho u) Y_0(u) ,$$

$$x = \lambda a, u = \sqrt{\sigma^2 - x^2} \quad \text{and} \quad v = \sqrt{\beta^2 \sigma^2 - x^2} .$$

The integral along the real axis (51), may now be transformed to a contour integral in the complex x -plane. The path of integration will be chosen to guarantee the convergence of the integral; but before determining the actual path, we must investigate the poles and the branch points of the integrand.

A - THE SIGNIFICANCE OF THE POLES OF THE INTEGRAND.

The poles of the integrand in the complex x -plane that give physically significant results are those that are situated on the real or the imaginary axis. The residues of any poles on the imaginary axis would yield terms of the form

$$\text{const } H_0^{(1)}(\sqrt{\beta^2 \sigma^2 + x_0^2} \frac{r}{a}) e^{-x_0 \frac{z}{a}} .$$

These are Zenneck surface waves which propagate radially outward along the surface $z=0$ but attenuate in the z -direction [8]. The residues of the poles on the real axis ($|x_1| > \beta \sigma$) give terms of the form

$$\text{const } H_0^{(1)}(i\sqrt{x_1^2 - \beta^2 \sigma^2} \frac{r}{a}) e^{ix_1 \frac{z}{a}} ,$$

which unlike the former waves propagate unattenuated in the positive z -direction and are guided by the dielectric coating. These surface waves decay exponentially in the radial direction and are of the Sommerfeld-Goubau type. The residues of

the complex poles of the integrand give waves which decay exponentially both in the z and r direction and have no physical interest.

B - POSITION OF POLES.

Although poles of integrand seem to be situated at the points $x = \pm a \gamma_n$ where $n=0, 1, 2, \dots$, a Laurent series expansion about these points shows that $I(u, v)$ has simple poles there. Thus these points ($x = \pm a \gamma_n$) are in fact ordinary points of the integrand. To locate the significant zeros of $I(u, v)$, we can make the following classification ($x = s + it$):

- (i) The imaginary axis $s=0$, $0 \leq |t| < \infty$;
- (ii) The real axis $t=0$, $0 < |s| \leq \beta \sigma$;
- (iii) The real axis $t=0$, $\beta \sigma \leq |s| \leq \sigma$,
- (iv) The real axis $t=0$, $\sigma \leq |s| < \infty$.

- (i) For $s=0$, $0 \leq |t| < \infty$.

If we set $x = it$ in (51) and equate the result to zero we obtain,

$$\frac{H_0^{(1)}(\sqrt{\beta^2 \sigma^2 + t^2})}{\sqrt{\beta^2 \sigma^2 + t^2} H_0^1(\sqrt{\beta^2 \sigma^2 + t^2})} = - \frac{J_1(\sqrt{\sigma^2 + t^2}) Y_0(\rho \sqrt{\sigma^2 + t^2}) - J_0(\rho \sqrt{\sigma^2 + t^2}) Y_1(\sqrt{\sigma^2 + t^2})}{J_0(\sqrt{\sigma^2 + t^2}) Y_0(\rho \sqrt{\sigma^2 + t^2}) - J_0(\rho \sqrt{\sigma^2 + t^2}) Y_0(\sqrt{\sigma^2 + t^2})} \quad (53)$$

If there are poles on the imaginary axis, (53) must be satisfied for some real t . However the **L.H.S.** is a complex number; more over the imaginary part of the L.S.H. is given by

$$\beta^2 \frac{-J_1(\sqrt{\beta^2 \sigma^2 + t^2}) Y_0(\sqrt{\beta^2 \sigma^2 + t^2}) + Y_1(\sqrt{\beta^2 \sigma^2 + t^2}) J_0(\sqrt{\beta^2 \sigma^2 + t^2})}{\sqrt{(\beta^2 \sigma^2 + t^2)} \left| H_0^{(1)}(\sqrt{\beta^2 \sigma^2 + t^2}) \right|^2}$$

or

$$\frac{\beta^2}{2\pi (\beta^2 \sigma^2 + t^2) \left| H_0^{(1)}(\sqrt{\beta^2 \sigma^2 + t^2}) \right|^2},$$

which is positive for all real values of t . Thus for all finite values of x $I(u, v)$ is different from zero, and there are no poles on the imaginary axis. This is an expected result since the surface, $z=0$, has no reactive component, i.e. is not covered by a dielectric coating which is necessary to sustain radial surface wave [9].

(ii) For $t=0$, $0 \leq |s| \leq \beta\sigma$,

To find the zeros of $I(u, v)$ on this portion of the real axis we replace in (52) x by s , obtaining

$$\frac{\beta^2 H_0^{(1)}(\sqrt{\beta^2 \sigma^2 - s^2})}{\sqrt{\beta^2 \sigma^2 - s^2} H_0^{(1)}(\sqrt{\beta^2 \sigma^2 - s^2})} = \frac{1}{\sqrt{\sigma^2 - s^2}} \frac{J_1(\sqrt{\sigma^2 - s^2}) Y_0(\rho \sqrt{\sigma^2 - s^2}) - J_0(\rho \sqrt{\sigma^2 - s^2}) Y_1(\sqrt{\sigma^2 - s^2})}{J_0(\sqrt{\sigma^2 - s^2}) Y_0(\rho \sqrt{\sigma^2 - s^2}) - J_0(\rho \sqrt{\sigma^2 - s^2}) Y_0(\sqrt{\sigma^2 - s^2})} \quad (54)$$

For $0 \leq s \leq \beta\sigma$ we have the same situation as in (i); the R.H.S. is always real while the L.H.S. remains always a complex quantity whose imaginary part is non zero and so $I(u, v)$ has no zero in this interval.

(iii) For $t=0$ $\beta\sigma \leq |s| \leq \sigma$;

In this region the argument of the Hankel functions becomes a pure

imaginary number and the L.H.S. of (54) changes to,

$$\frac{\beta^2 K_1(\sqrt{s^2 - \beta^2 \sigma^2})}{\sqrt{s^2 - \beta^2 \sigma^2} K_0(\sqrt{s^2 - \beta^2 \sigma^2})}, \quad (55)$$

where K_0 and K_1 are modified Bessel functions of the second kind of zero and first order;

$$K_0(z) = i \frac{\pi}{2} H_0^{(1)}(iz),$$

or

$$K_1(z) = -\frac{\pi}{2} H_1^{(1)}(iz).$$

(55) is a rapidly decreasing function of s with infinite value at $s = \pm \beta \sigma$ and decays to zero as $|s| \rightarrow \infty$. To show the existence of a zero in this region, let us take the special case $\rho \rightarrow 1$ and expand every term of the R.H.S. in a Taylor series in the neighborhood of $\rho = 1$. Taking the dominant terms we have,

$$\text{R.H.S.} = \frac{1}{(1-\rho)(\sigma^2 - s^2)}.$$

Both sides of (54) are shown graphically in Fig. (2) and we notice that a zero exists at the intersection of the two curves.

(iv) For $t=0$ $\sigma \leq |s| < \infty$;

In this region the arguments of all Bessel functions in (54) become pure imaginary numbers. Replacing these functions by their modified forms we have,

$$\frac{\beta^2 K_1(\sqrt{s^2 - \sigma^2} \beta^2)}{\sqrt{s^2 - \beta^2 \sigma^2} K_0(\sqrt{s^2 - \beta^2 \sigma^2})} = - \frac{I_1(\sqrt{s^2 - \sigma^2}) K_0(\rho \sqrt{s^2 - \sigma^2}) + K_1(\sqrt{s^2 - \sigma^2}) I_0(\rho \sqrt{s^2 - \sigma^2})}{\sqrt{s^2 - \sigma^2} [I_0(\sqrt{s^2 - \sigma^2}) K_0(\rho \sqrt{s^2 - \sigma^2}) - K_0(\sqrt{s^2 - \sigma^2}) I_0(\rho \sqrt{s^2 - \sigma^2})]}, \quad (55)$$

where

$$I_0(z) = J_0(iz),$$

and

$$I_1(z) = -i J_1(iz).$$

The R.H.S. is always negative* while the L.H.S. is positive and thus in the finite part of this region no zero can exist.

C - PHYSICAL CONSEQUENCE OF THE POLE OF REGION (iii),

From the above discussions we can see that the antenna excites a single surface wave mode of Sommerfeld-Goubau type which is sustained by the geometry. The ϕ component of the magnetic field of this surface wave has the form,

$$\text{const } K_1(\sqrt{s_0^2 - \beta^2 \sigma^2} r) e^{is_0 \frac{z}{a}}, \quad (57)$$

where $\frac{s_0}{a}$ is the propagation constant of the surface wave and $s_0 = a\lambda_0$ is the real zero of $I(u, v)$ in the interval $\beta\sigma \leq s_0 \leq \sigma$. If we draw a graph of

*The numerator is always positive. The denominator can be written as follows:

$$I_0(\rho \sqrt{s^2 - \sigma^2}) K_0(\rho \sqrt{s^2 - \sigma^2}) \left[\frac{I_0(\sqrt{s^2 - \sigma^2})}{I_0(\rho \sqrt{s^2 - \sigma^2})} - \frac{K_0(\sqrt{s^2 - \sigma^2})}{K_0(\rho \sqrt{s^2 - \sigma^2})} \right]. \quad \text{The first term in}$$

the bracket is always greater than unity while the second term is smaller than unity.

s_0 vs. σ for small values of ϵ , $\epsilon = \sigma(1-\rho)$, we see that we have a linear relationship between s_0 and σ , Fig. (3). The ratio

$$\frac{\sigma}{s_0} = \frac{ak_1}{a\lambda_0} = \frac{\omega}{c_1\lambda_0} = \frac{v_p}{c_1} = \text{const.} ,$$

where c_1 is the velocity of light in the dielectric medium. This shows that the phase velocity of the surface wave is constant for all exciting frequencies and the surface wave has no cutoff frequency. We note that for all frequencies the geometry sustains only one principal mode whereas in the excitation of a dielectric rod with no inner conductor one obtains modes whose number increases proportionally to the frequency [10].

D - THE BRANCH POINTS.

Because of the logarithmic singularity exhibited by the Bessel functions of the second kind, branch points might be expected at points corresponding to $u = 0$ and $v = 0$. It turns out however that the function $h(u) = \frac{1}{u} \frac{\delta_1(u)}{\delta_0(u)}$ is even in u when $u \rightarrow 0$ and in that vicinity behaves as $\frac{\text{const}}{u^2}$. Thus although u is multivalued near the points $x = \pm \sigma$, $h(u)$ has only simple poles at these points. The integrand does have branch points at $x = \pm \beta \sigma$ ($v = 0$).

E - THE PATH OF INTEGRATION.

Knowing the position of the singularities of the real line we choose the path of integration as shown in Fig. (4), where the branch cuts are taken parallel to the imaginary axis. The integral over the real line becomes,

$$\int_{-\infty}^{\infty} = 2\pi i \sum \text{Residues} - \int_R - \int_{\Gamma} - \sum \int_{r_i}$$

sum over small
semi-circles

In the upper half plane \oint_R vanishes as $R \rightarrow \infty$ and the integral over small semi-circles can be easily evaluated. The integrals along the branch cuts give us the radiation field and in the radiation zone these integrals can be evaluated approximately using the method of saddle point integration.

VII. THE RADIATION PATTERN

The φ component of magnetic field can be found by using (3), i.e.

$$H_{\varphi} = \frac{2\omega\epsilon_2}{a\pi^2} \int_{-\infty}^{\infty} \frac{H_1^{(1)}(k_2' r)}{H_0^{(1)}(k_2' a)} \frac{e^{i\lambda z}}{k_2'} \frac{d\lambda}{I(\lambda)} \times \left[\sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda^2} - \frac{\pi}{2} \frac{b_0 \gamma_0}{\gamma_0^2 - \lambda^2} \right] \quad (58)$$

Since we are interested in the field at very large distances from the source, we are justified in replacing the Hankel function in the numerator by its asymptotic representation. Thus we obtain,

$$H_{\varphi} \approx \frac{2\omega\epsilon_2}{a\pi^2} \sqrt{\frac{2}{\pi r}} e^{-\frac{3\pi i}{4}} \int_{-\infty}^{\infty} \frac{e^{i(k_2' r + \lambda z)}}{H_0^{(1)}(k_2' a) k_2'^{3/2} I(\lambda)} \times \left[\sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda^2} - \frac{\pi}{2} \frac{b_0 \gamma_0}{\gamma_0^2 - \lambda^2} \right] d\lambda \quad (59)$$

The cylindrical coordinate system in which the fields are expressed is not suitable for obtaining the radiation pattern at large distances. For this reason we shall use spherical coordinates shown in Fig. (5) where,

$$r = R \sin\theta ,$$

and

$$z = R \cos\theta .$$

The electric field components in this system are found from $-\omega\epsilon\mathbf{E} = \nabla \times \mathbf{H}$, i.e.

$$E_r = \frac{i}{\omega \epsilon R \sin \theta} \frac{\partial}{\partial \theta} (\sin \theta H_\phi), \quad (60)$$

and

$$E_\theta = \frac{i}{\omega \epsilon R} \frac{\partial}{\partial R} (R H_\phi). \quad (61)$$

In spherical coordinates (59) becomes,

$$H_\phi = \frac{2\omega \epsilon}{a\pi^2} \sqrt{\frac{2}{\pi R \sin \theta}} e^{\frac{-3\pi i}{2}} \int_{-\infty}^{\infty} \frac{e^{iR[\sin k_2' + \lambda \cos \theta]}}{H_0^{(1)}(k_2' a) k_2'^{3/2} I(\lambda)} d\lambda \quad (62)$$

$$\sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n b)} \frac{\gamma_n}{\gamma_n^2 - \lambda^2} - \frac{\pi}{2} \frac{b_0 \gamma_0}{\gamma_0^2 - \lambda^2} d\lambda$$

In equation (61) the integral can be approximated by means of the method of steepest descent since R is large. The saddle point is situated at that value of λ for which,

$$\frac{d}{d\lambda} (\sin \theta k_2' + \lambda \cos \theta) = 0, \quad (63)$$

or

$$\lambda = k_2 \cos \theta.$$

The contribution to the integral from the neighborhood of the saddle point turns out to be

$$H_\phi \approx \sqrt{\frac{\epsilon_2}{\mu_2}} \frac{e^{ikR}}{R} g_1(k_2 \cos \theta), \quad (64)$$

where,

$$g_1(k_2 \cos \theta) =$$

$$\frac{\frac{2b_0}{\pi} \frac{\gamma_0}{\gamma_0^2 - k_2^2 \cos^2 \theta} - \frac{4}{\pi^2 a} \sum_{n=1}^{\infty} b_n \gamma_n \frac{J_0(\alpha_n b)/J_0(\alpha_n a)}{(\gamma_n^2 - k_2^2 \cos^2 \theta)}}{\sin \theta H_0^{(1)}(k_2 a \sin \theta) \left(\frac{\beta^2 H^{(1)}(k_2 a \sin \theta)}{k_2 \sin \theta H_0^{(1)}(k_2 a \sin \theta)} - \frac{1}{v} \frac{J_1(v) Y_0(\rho v) - J_0(\rho v) Y_1(v)}{J_0(v) Y_0(\rho v) - J_0(\rho v) Y_0(v)} \right)}$$

and $v = \sqrt{k_1^2 - k_2^2 \cos^2 \theta}$. Up to terms of order $O(\frac{1}{R})$. The Poynting vector is

$$P = \frac{1}{2} \operatorname{Re}(E_{\theta} H_{\phi}^*) \sim |H_{\phi}|^2 \quad (65)$$

Fig. (5) is a drawing of the radiation pattern, where for small ϵ only the first term of the series has been taken. It can be seen that as the ratio $\frac{b}{a} \rightarrow 1$, the radiation becomes more and more into the forward direction.

VIII EFFICIENCY

With a suitable choice of the transverse dimensions a , b and the parameter $\beta = \sqrt{\frac{\epsilon_2}{\epsilon_1}}$ the geometry may be used as a transmission line to carry surface wave energy from one point to another. This line has no cutoff frequency. Single wire transmission lines of this kind have already been put into use to feed television antennas at a carrier frequency of 200 MC [2].

For this application we define the efficiency to be the ratio of the energy carried as surface wave to the total energy delivered by the coaxial line, i.e.

$$E = \frac{\text{Power Propagated as S.W.}}{\text{Total Power}} \quad (66)$$

The total power is found by integrating the Poynting vector on a surface in the coaxial region and at a distance great enough for the higher modes to have decayed

$$P_{\text{total}} = \frac{1}{2} \operatorname{Re} \int_S (\underline{E}_A \underline{H}^*) \cdot d\mathbf{s}. \quad (67)$$

Replacing \underline{E} and \underline{H} from equations (2), (3) and (5) in (67) we get,

$$P_{\text{total}} = \pi \omega^2 \sqrt{\frac{\epsilon_1}{\mu_1}} \log_e \frac{a}{b} (1 - |a_0|^2). \quad (68)$$

Similarly, the energy propagated as a surface wave along the z -axis is found by integrating the Poynting vector over a transverse plane since the surface wave has no radiation in the r direction.

Following the discussion in sec. VII, the potential function in region (3)

responsible for the surface wave is,

$$\Phi_{s\omega_3} = 2\pi i \text{ Res. of } \psi_3 \Big|_{\lambda=\lambda_0},$$

or

$$\Phi_{s\omega_3} = \frac{-4}{\pi a v_3^2} \frac{K_0(v_3 r) e^{i\lambda_0 z}}{K_0(v_3 a) S} \left(\sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda_0^2} - \frac{\pi}{2} \frac{b_0 \gamma_0}{\gamma_0^2 - \lambda_0^2} \right), \quad (69)$$

where

$$S = \frac{d}{d\lambda} I(\lambda) \Big|_{\lambda=\lambda_0}, \quad (70)$$

and

$$v_3 = \sqrt{\lambda_0^2 - k_2^2}.$$

The field components $H_{\phi 3}$ and E_{r3} are,

$$H_{\phi 3} = -M_3 K_1(v_3 r) e^{i\lambda_0 z}, \quad (71)$$

and

$$E_{r3} = -\frac{\lambda_0}{\omega \epsilon_2} M_3 K_1(v_3 r) e^{i\lambda_0 z}, \quad (72)$$

where

$$M_3 = \frac{4}{\pi a} \frac{i\omega \epsilon_2 v_3}{K_0'(v_3 a)} \frac{\sum_{n=1}^{\infty} b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda_0^2} - \frac{\pi}{2} \frac{b_0 \gamma_0}{\gamma_0^2 - \lambda_0^2}}{S(k_2^2 - \lambda_0^2)}. \quad (73)$$

The surface wave power propagating in region (3) is

$$P_{s3} = \pi \frac{\lambda_0}{\omega \epsilon_2} |M_3|^2 J_3 \quad (74)$$

where

$$J_3 = \frac{a^2}{2} [K_1'^2(v_3 a) - (1 + \frac{1}{v_3^2 a^2}) K_1(v_3 a)]$$

In a very similar manner we can find the field components of the surface wave in region 2, i.e.

$$H_{\phi 2} = M_2 \Delta_2(v_2 r) e^{i\lambda_0 z},$$

and

$$E_{r2} = \frac{\lambda_0}{\omega \epsilon_1} M_2 \Delta_2(v_2 r) e^{i\lambda_0 z}$$

where

$$\Delta_2(v_2 r) = J_1(v_2 r) Y_0(v_2 b) - Y_1(v_2 r) J_0(v_2 b),$$

$$M_2 = \frac{4i\omega\epsilon_1 v_2}{a\pi} \frac{\sum_1 b_n \frac{J_0(a_n b)}{J_0(a_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda^2} - \frac{\pi}{2} \frac{b_0 \gamma_0}{\gamma_0^2 - \lambda^2}}{S\Delta_1(v_2 a) (k_1^2 - \lambda_0^2)}, \quad (75)$$

and

$$v_2 = \sqrt{k_1^2 - \lambda_0^2}.$$

The power propagating in the z direction due to this field is,

$$P_2 = \frac{\pi\lambda_0}{\omega\epsilon_1} |M_2|^2 J_2, \quad (76)$$

where

$$J_2 = \frac{a^2}{2} \left[\left| \begin{matrix} J_1(v_2 a) & Y_1(v_2 a) \\ J_0(v_2 b) & Y_0(v_2 b) \end{matrix} \right|^2 - \left| \begin{matrix} J_0(v_2 a) & Y_0(v_2 a) \\ J_0(v_2 a) & Y_0(v_2 b) \end{matrix} \right| \left| \begin{matrix} J_2(v_2 a) & Y_2(v_2 a) \\ J_0(v_2 b) & Y_0(v_2 b) \end{matrix} \right| \right] - \frac{2}{\pi^2 v_2^2}. \quad (77)$$

For the case when $\epsilon \rightarrow 0$, $\rho \rightarrow 1$ and $\sigma \neq 0$ M_2 and M_3 can be approximated by the first term of the series, or,

$$M_2 = -\frac{2}{a} \frac{i\omega\epsilon_1}{v_2^4} \times \frac{b_0\gamma_0}{\Delta_1(v_2a)S} + O(\epsilon^2)$$

and

$$M_3 = \frac{2}{a} \frac{i\omega\epsilon_2}{v_2^2 v_3^2} \frac{b_0\gamma_0}{K_0(v_3a)S} + O(\epsilon^2)$$

The total power propagating in the two media due to the surface wave is found to be,

$$P_{SW} = \pi\omega\lambda_0 \left| \frac{b_0}{S} \right|^2 \frac{4\gamma_0}{a^2 v_2^4} \left[\frac{\epsilon_1 J_2}{v_2^2 \Delta_1^2 (v_2 a)} + \frac{\epsilon_2 J_3}{v_3^2 K_0^2 (v_3 a)} \right] + O(\epsilon^2) \quad (78)$$

and here the efficiency is

$$E = \frac{|1-a_0|^2}{1-|a_0|^2} \frac{4\lambda_0\gamma_0}{a^2 v_2^4 S^2} \frac{\frac{J_2^2 \epsilon_1}{v_2^2 \Delta_1^2 (v_2 a)} + \frac{J_3^2 \epsilon_2}{v_3^2 K_0^2 (v_3 a)}}{\epsilon_1 \log \frac{a}{b}} \quad (79)$$

The value of S is

$$\begin{aligned} S = & \frac{a^3 \beta^2 \lambda_0}{r_3^3 K_0^2(r_3)} [r_3^2 K_0^2(r_3) + r_3^2 K_1^2(r_3) + 2K_0(r_3) K_1(r_3)] \\ & + \frac{a^3 \lambda_0}{r_2^3 r_1^3 \delta_{00}^2} [r_1 r_2 (\delta_{00}^2 + \delta_{10}^2) - 2r_1 \delta_{00} \delta_{10} \\ & + r_1^2 \delta_{01} \delta_{10} - r_1^2 \delta_{11} \delta_{00}] , \end{aligned} \quad (80)$$

where,

$$\delta_{nm} = J_n(r_1) Y_m(r_2) - J_m(r_2) Y_n(r_1) ,$$

$$r_1 = a \sqrt{k_1^2 - \lambda_0^2} ,$$

$$r_2 = b \sqrt{k_1^2 - \lambda_0^2} ,$$

$$r_3 = a \sqrt{\lambda_0^2 - k_2^2} .$$

IX. ADMITTANCE

The driving point admittance of this radiating system at $z = 0$ may be defined as,

$$Y = \frac{I(0)}{V(0)}, \quad (82)$$

where

$$V(0) = \int_b^a E_r dr, \quad (83)$$

is the voltage at the base of the antenna and

$$I(0) = \oint_{r=b} H_\phi dr \quad (84)$$

is the current being fed into the half space. From (2) and (5) we have

$$E_{r3} = \frac{1-a_0 e^{-2i\gamma_0}}{r} i\gamma_0 e^{i\gamma_0 z} - i \sum_{n=1}^{\infty} \gamma_n a_n \phi'_{on}(a_n r) e^{-i\gamma_n z}, \quad (85)$$

where the prime denotes differentiation with respect to r . With the help of (85), (83) becomes,

$$V(0) = i\gamma_0 [1-a_0] \log \frac{a}{b} \quad (86)$$

Similarly from (3) and (5) we obtain,

$$\frac{1}{i\omega\epsilon} H_\phi = \frac{1+a_0 e^{-2i\gamma_0 z}}{r} e^{i\gamma_0 z} + \sum_{n=1}^{\infty} a_n \phi'_{on}(a_n r) e^{-i\gamma_n z}, \quad (87)$$

and thus (84) becomes

$$I(0) = 2\pi i\omega\epsilon [(1+a_0) + b \sum_{n=1}^{\infty} a_n \phi'_{on}(a_n b)] \quad (89)$$

Using (32), (89) reduces to,

$$I(o) = 2\pi i \omega \epsilon [(1 + a_o) - \frac{2}{\pi} \sum_{n=1}^{\infty} a_n] , \quad (90)$$

and so

$$Y = Y_o \frac{1+a_o}{1-a_o} - \frac{2Y_o}{\pi(1-a_o)} \sum_{n=1}^{\infty} a_n \quad (91)$$

where Y_o is the characteristic impedance of the coaxial system,

$$Y_o = \frac{2\pi\omega\epsilon}{\gamma_o \log \frac{a}{b}} . \quad (92a)$$

The first term on the R.H.S. of (91) gives the admittance that would be determined from standing wave measurements made at large enough distances in the coaxial line such that all the higher modes could be neglected. Figs. (6) and (7) show graphs of real and imaginary parts of $\frac{Y}{Y_o} = \frac{1+a_o}{1-a_o}$ against the ratio $\rho = \frac{b}{a}$.

Appendix (i): Convergence of the Integral ρ_{mn} .

In (45) let us substitute the following quantities, ρ , σ , x and β for b/a , ka , λa and k_2/k_1 . As a result the integral becomes dimensionless and we obtain

$$C_{mn} = \frac{\sigma^2}{k_1^2} \int_0^\infty U_{mn} dx \quad (92)$$

where

$$U_{mn} = \frac{1}{(a^2 \gamma_n^2 - x^2)(a^2 \gamma_m^2 - x^2)I(u, v)} \quad (93)$$

The integral can be transformed into a contour integral in the complex x -plane covering a path similar to that of Fig. (4). For m and $n \neq 0$, on the real axis the integrand has a branch point $|x| = \beta\sigma$, a surface wave pole at $|x| = x_0$ ($\beta\sigma \leq x_0 \leq \sigma$) and a zero at $|x| = \sigma$. For $m = n = 0$, U_{00} has a pole at $|x| = \sigma$. The integral is bounded at its upper limit since, for $x_1 \gg \delta > \sigma$ we have,

$$\left| \int_{x_1}^\infty U_{mn} dx \right| \leq \int_{x_1}^\infty O\left(\frac{1}{x^3}\right) dx \quad (94)$$

In the complex plane, since the contribution about the branch points and the large semi-circle vanish, we have,

$$2C_{mn} = \Sigma \text{Residues on the upper half plane} - \int_\Gamma U_{mn} \quad (95)$$

As long as $\beta = k_2/k_1 < 1$, the number of residues will remain finite* and along the branch cuts it can be seen that U_{mn} is finite and bounded. Thus the second term in R.H.S. of (95) will be a finite number and so C_{mn} is finite.

For fixed $m, n \neq 0$ and if $\rho \rightarrow 1, \sigma \neq 0$ such that $\epsilon = (1 - \rho) \rightarrow 0$ we have

$$a^2 \gamma_n^2 \sim \sigma^2 - \frac{\sigma^2 n^2 \pi^2}{\epsilon^2} \quad (96)$$

Substituting (96) in (92) gives the following results:

$$\begin{aligned} C_{mn} &\sim O(\epsilon^5) & m, n \neq 0 \\ C_{mn} &\sim O(\epsilon^3) & m \neq 0, n = 0 \\ C_{mn} &\sim O(\epsilon) & m = n = 0 \end{aligned}$$

Similarly for $\sigma \rightarrow 0, \rho \neq 1$ and $\epsilon \rightarrow 0$,

$$C_{mn} \sim O(\epsilon^3) \text{ for all } m \text{ and } n.$$

Furthermore, for large n $U_{mn} \sim O(\frac{1}{n^2})$ for either one of the indices while the other is fixed or $U_{mn} \sim O(\frac{1}{n^2} \times \frac{1}{m^2})$ when both m and n are large.

*For large x , $U_{mn} \sim \frac{1}{x^3 [\coth(\rho-1)x - \beta^2]}$. The roots of the quantity in bracket are located at $x = (\frac{1}{\rho-1} \coth^{-1} \beta^2 + i \frac{n\pi}{\rho-1})$. $n = 0, \pm 1, \pm 2 \dots$.
If $\beta < 1$ it can be seen the bracketed term will never be zero.

Appendix (ii): The Solution of the Infinite Set of Equations.

The infinite set of equations in (43), (44) can be written as,

$$b_o = 1 + r_{oo} c_{oo} b_o - i \sum_{n=1}^{\infty} \gamma_n r_{on} c_{on} b_n, \quad (97)$$

$$b_n = i\omega_n [-\gamma_o b_o c_{no} + \frac{2}{\pi} \sum_{m=1}^{\infty} \gamma_m v_m b_m c_{nm}], \quad (98)$$

where

$$\omega_n = \frac{v_m}{v_m^2 - 1} \cdot \frac{1}{A}$$

$$v_m = \frac{J_o(\alpha_n b)}{J_o(\alpha_n a)}$$

$$r_{oo} = \frac{i\gamma_o}{\pi a \log \frac{a}{b}}$$

$$r_{on} = \frac{2}{\pi^2 a \log \frac{a}{b}} v_n.$$

This infinite set of equations may be solved by iteration. For the case when $\rho \rightarrow 1$, $\sigma \neq 0$, $\epsilon \rightarrow 0$, and if in the first approximation we neglect terms with coefficients greater than $O(\epsilon)$, we have,

$$b_o = \frac{1}{1 - r_{oo} c_{oo}}. \quad (99)$$

For the second approximation we neglect all terms with coefficients greater than $O(\epsilon^3)$ and using (99) we get,

$$b_n = -i\omega_n \frac{c_{no} \gamma_o}{1 - r_{oo} c_{oo}}, \quad (100)$$

where $\omega_n \sim O(\epsilon^{-1})$, $n \geq 1$ and $c_{no} \sim O(\epsilon^3)$. Replacing (100) in (97) we obtain the second approximate value for b_o ,

$$b_o = \frac{1}{(1 - r_{oo} c_{oo})} + \frac{\gamma_o}{(1 - r_{oo} c_{oo})^2} \sum_{n=1}^{\infty} \gamma_n r_{on} \omega_n c_{on}^2. \quad (101)$$

In the second term of equation (101), if it is permissible to change the order of summation and integration we obtain,

$$\sum_{n=1}^{\infty} \gamma_n r_{on} \omega_n c_{on}^2 = \frac{2}{\pi^2 a^2 \log \frac{a}{b}} \int_0^{\infty} \int_0^{\infty} \frac{d\lambda d\mu}{I(\lambda) I(\mu)} \sum_{n=1}^{\infty} F_n(\lambda, \mu),$$

where

$$F_n = \frac{\frac{v_n^2}{v_n^2 - 1}}{\frac{\gamma_n}{(\gamma_n^2 - \lambda^2)(\gamma_n^2 - \mu^2)(\gamma_0^2 - \lambda^2)(\gamma_0^2 - \mu^2)}}. \quad (102)$$

For $n \gg 1$, $\gamma_n \sim ik \frac{nm}{\epsilon}$ and thus for a fixed ϵ , $F_n \sim O(\frac{1}{n^3})$. We can see that the series converges quite rapidly. Having obtained b_0 and b_n we can use these values in (98) and get a more accurate value for b_n ,

$$b_n = \frac{i\omega_n \gamma_0}{1 - r_{oo} c_{oo}} \left(-c_{no} + \frac{2}{\pi} \sum_{m=1}^{\infty} \gamma_m \frac{v_m^2}{v_m^2 - 1} \left(\frac{c_{on} c_{om}^2}{\pi a \log \frac{a}{b}} - \frac{\gamma_0}{1 - r_{oo} c_{oo}} - 1 c_{nm} c_{om} \right) \right)$$

we can repeat the whole process until the difference between successive approximations become negligibly small.

Appendix (iii): An Alternative Method to Obtain b_n and $\xi(\lambda)$.

If we substitute (41) and (42) in (40) we get,

$$b_0 = 1 - \frac{1}{2 \log \frac{a}{b}} \int_0^\infty \frac{\xi(\lambda)}{k_1^2 - \lambda^2} d\lambda, \quad (103)$$

and

$$b_n = \frac{1}{\pi \alpha_{n1}^2} \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \int_0^\infty \frac{\xi(\lambda)}{k_1^2 - \alpha_n^2} d\lambda. \quad (104)$$

Replacing these in (34), we obtain an integral equation for $\xi(\lambda)$, i.e.

$$\xi(\lambda) I(\lambda) = d \zeta_0(\lambda) + \int_0^\infty \xi(\lambda') Q(\lambda, \lambda') d\lambda', \quad (105)$$

where

$$Q(\lambda, \lambda') = \sum_{n=0}^{\infty} d_n \zeta_n(\lambda) \zeta_n(\lambda'),$$

$$d_0 = \frac{i\gamma_0}{a\pi \log \frac{a}{b}},$$

$$d_n = \frac{2i}{a\pi} \gamma_n \frac{v_m^2}{v_m^2 - 1},$$

$$d = -\frac{2i\gamma_0}{a\pi},$$

and

$$\zeta_n = \frac{1}{\gamma_n^2 - \lambda^2}.$$

For the case when $\rho \rightarrow 1$, $\sigma \neq 0$ and $\epsilon \rightarrow 0$, if we neglect terms of order greater than $O(\epsilon^0)$, $Q(\lambda, \lambda')$ becomes

$$Q(\lambda, \lambda') = d_0 \zeta_0(\lambda) \zeta_0(\lambda') + O(\epsilon^2). \quad (106)$$

Putting (106) in (105) we obtain,

$$\xi(\lambda) = \frac{\zeta_0(\lambda)}{I(\lambda)} \left[d + d_0 \int_0^\infty \xi(\lambda') \zeta_0(\lambda') d\lambda' \right] \quad (107)$$

Multiply (107) by $\zeta_0(\lambda)$ and integrate it from zero to infinity, gives

$$\int_0^\infty \xi(\lambda') \zeta_0(\lambda') d\lambda' = \frac{d \int_0^\infty \zeta_0^2(\lambda)/I(\lambda) d\lambda}{1 - d_0 \int_0^\infty \zeta_0^2(\lambda)/I(\lambda) d\lambda}, \quad (108)$$

and hence,

$$\xi(\lambda) = d \frac{J_0(\lambda)}{I(\lambda)} + \frac{dd_0 \zeta_0(\lambda)}{I(\lambda)} \frac{\int_0^\infty \zeta_0^2(\lambda)/I(\lambda) d\lambda}{1 - d_0 \int_0^\infty \zeta_0^2(\lambda)/I(\lambda) d\lambda}. \quad (109)$$

If we use (109) to find b_0 , we get the same result as was found in (46).

Appendix (iv): Solution of this Problem in the absence of Dielectric.

If in Fig. (1), we let $\epsilon_1 = \epsilon_2$ and $\mu_1 = \mu_2$, the problem reduces to that solved by V. M. Papadopoulos [3], and under the above conditions we can show that the results of this problem agree with Papadopoulos. For this purpose we will try to derive equation (28) of [3] from our equation (63) by letting $\epsilon_1 = \epsilon_2$. The only function undergoing appreciable change is the function $I(\lambda)$ given by (50). When $\epsilon_1 = \epsilon_2$, $k'_1 = k'_2 = k' = \sqrt{k^2 - \lambda^2}$ and $I(\lambda)$ becomes,

$$I(\lambda) = \frac{H_0^{(1)}(k'a)}{k' H_0^{(1)}(k'a)} - \frac{c'_0(k'a)}{k' c_0(k'a)}, \quad (110)$$

where

$$c_0(k'a) = J_0(k'a) Y_0(k'b) - J_0(k'b) Y_0(k'a),$$

and

$$c'_0(k'a) = J'_0(k'a) Y_0(k'b) - J_0(k'b) Y'_0(k'a).$$

The Wronskian relation for the pair $H_0^{(1)}(k'r)$ and $c_0(k'r)$ is,

$$H_0^{(1)}(k'r) c'_0(k'r) - H_0^{(1)'}(k'r) c_0(k'r) = -\frac{4i}{\pi k'r} H_0^{(1)}(k'r). \quad (111)$$

Using (111), (110) becomes,

$$I(\lambda) = \frac{2}{\pi k'^2_a} \frac{H_0^{(1)}(k'b)}{H_0^{(1)}(k'a)} \frac{1}{c_0(k'a)}. \quad (112)$$

In (112), replace k' by $k \sin \theta$ and substitute this in the expression for $g_1(k_2 \cos \theta)$, then (64) becomes,

$$\begin{aligned}
 H_{\phi} \approx \text{const} \frac{e^{ikR}}{R} \frac{\sin \theta}{H_0^{(1)}(kb \sin \theta)} \left\{ J_0(ka \sin \theta) Y_0(kb \sin \theta) - \right. \\
 \left. J_0(kb \sin \theta) Y_0(ka \sin \theta) \right\} \sum \frac{b_n \gamma_n J_0(\alpha_n b) / J_0(\alpha_n a)}{\gamma_n^2 - k^2 \cos \theta} \quad (113)
 \end{aligned}$$

This result corresponds to that derived by Papadopoulos. Instead of $\exp(-ikR)/H_0^{(1)}(kb \sin \theta)$ we have $\exp(ikR)/H_0^{(1)}(kb \sin \theta)$ since we have assumed $\exp(-i\omega t)$ time dependence instead of $\exp(i\omega t)$.

Appendix (v): Non Existence of Coaxial Modes in Region (2).

In Sec. III, the Function F in equation (15) was expanded in terms of the coaxial eigen vectors $\phi_{oi}(\alpha_n r)$. We can now show that these modes are cancelled by the residues of the integral in (20). Substitution of the expression for $\xi(\lambda)$ into (20) results in,

$$\psi_2 = \sum b_n \phi_{on} e^{i\gamma_n z} + \frac{2i}{a\pi^2} \int_{-\infty}^{\infty} \frac{\Delta_1(k_1' r)}{\Delta_1(k_1' a)} \frac{e^{i\gamma z}}{I(\lambda)(k_1^2 - \lambda^2)} x$$

$$\left(\sum_n b_n \frac{J_0(\alpha_n b)}{J_0(\alpha_n a)} \frac{\gamma_n}{\gamma_n^2 - \lambda^2} - \frac{\pi}{2} \frac{\gamma_0 b_0}{\gamma_0^2 - \lambda^2} \right). \quad (114)$$

The terms in brackets have poles at $\lambda = \gamma_n$ for $n = 0, 1, 2, \dots$. $\Delta_1(k_1' a)$ has a zero while $I(\lambda)$ has poles at these points. As a result the integrand has simple poles at $\lambda = \gamma_n$ for $n = 0, 1, 2, \dots$. Transforming the integral to a contour integral similar to Fig. (4), we obtain,

$$\int_{-\infty}^{+\infty} = \sum_{n=0}^{\infty} R_n + \sum \text{Residue of other Points} - \int_{\Gamma}, \quad (115)$$

where R_n is the residue due to pole at γ_n . By simple manipulation we find R_n to be,

$$R_n = -\frac{a\pi^2}{2i} b_n \phi_{on}(\alpha_n r) e^{i\gamma_n z}. \quad (116)$$

Putting (115) in (114) cancels all modes $\phi_{oi}(\alpha_i r)$.

Appendix (vi) Calculation for Y/Y_0 .

In Sec. IX we found the admittance of the antenna looking into the half space to be,

$$\frac{Y}{Y_0} = \frac{1 + a_0}{1 - a_0} - \frac{2}{\pi} \sum_{n=1}^{\infty} a_n.$$

For the first approximation neglecting all terms with index $n \geq 1$ we get,

$$\frac{Y}{Y_0} = \frac{1 + a_0}{1 - a_0}, \quad (117)$$

or substituting for a_0 from (47), we obtain

$$\frac{Y}{Y_0} = 1 - 2i \frac{\gamma_0 c_{00}}{\pi a \log_e \frac{a}{b}}, \quad (118)$$

or

$$\frac{Y}{Y_0} = \left(1 + \frac{2\sigma \operatorname{Im} c_{00}}{\pi \log \frac{a}{b}} - 2i \frac{\sigma \operatorname{Re} c_{00}}{\pi \log \frac{a}{b}} \right). \quad (119)$$

To find $\frac{Y}{Y_0}$ we have to calculate the value of c_{00} from the expression in (45). The integral c_{00} is divided into three ranges viz: $0 \leq \lambda \leq \beta\sigma$, $\beta\sigma \leq \lambda \leq \sigma$ and $\sigma \leq \lambda < \infty$, since in each of the regions the integrand is completely different from the other regions. For this calculation the real and the imaginary parts of the integrand of c_{00} (45) were programmed on the IBM 650 computer, the results plotted on graph paper, and the area under the curves measured by a planimeter. At the two simple poles of the integrand, the integrand was expanded in Laurent series and the principal part was calculated. The accuracy of the graphs $\frac{Y}{Y_0}$ in Figs. (6) and (7) greatly depend upon the accuracy of the

measurement of the area by the planimeter. However the curve for $\text{Re } \frac{Y}{Y_0}$ against ρ is quite accurate.

References

1. N. V. Zernov, "On the Radiation of E. M. Waves from a Circular Wave Guide", AFCRC-TN-55-570.
2. G. N. Barlow, "Surface Waves", I.R.E., July 1958, pp. 1413-17.
3. V. M. Papadopoulos, "Wave Propagation in a Coaxial System", Quarterly of Applied Mathematics, vol. XVIII, No. 4, January 1960.
4. S. A. Schelkunoff and H. T. Fris, "Antenna Theory and Practice", John Wiley and Sons.
5. J. A. Stratton, "Electromagnetic theory", McGraw Hill.
S. A. Schelkunoff, "E. M. Waves", Van Nostrand.
6. N. Marcuvitz, "Waveguide Handbook", McGraw Hill.
7. N. W. McLachlan, "Bessel Functions for Engineers", Oxford University Press.
8. K. P. Sharma, "An Investigation of Excitation of Radiation by Surface Waves", I. E. E., March 1959, pp. 116-122.
9. J. Brown and K. P. Sharma, "The Launching of Radial Cylindrical Surface Waves by Circumferential Slot", I.E.E., March 1959, p. 123.
10. J. W. Dunca, "The Efficiency of Excitation of Surface Waves on a Dielectric Cylinder", I.R.E. Transactions, vol. MTT-7, April 1959.

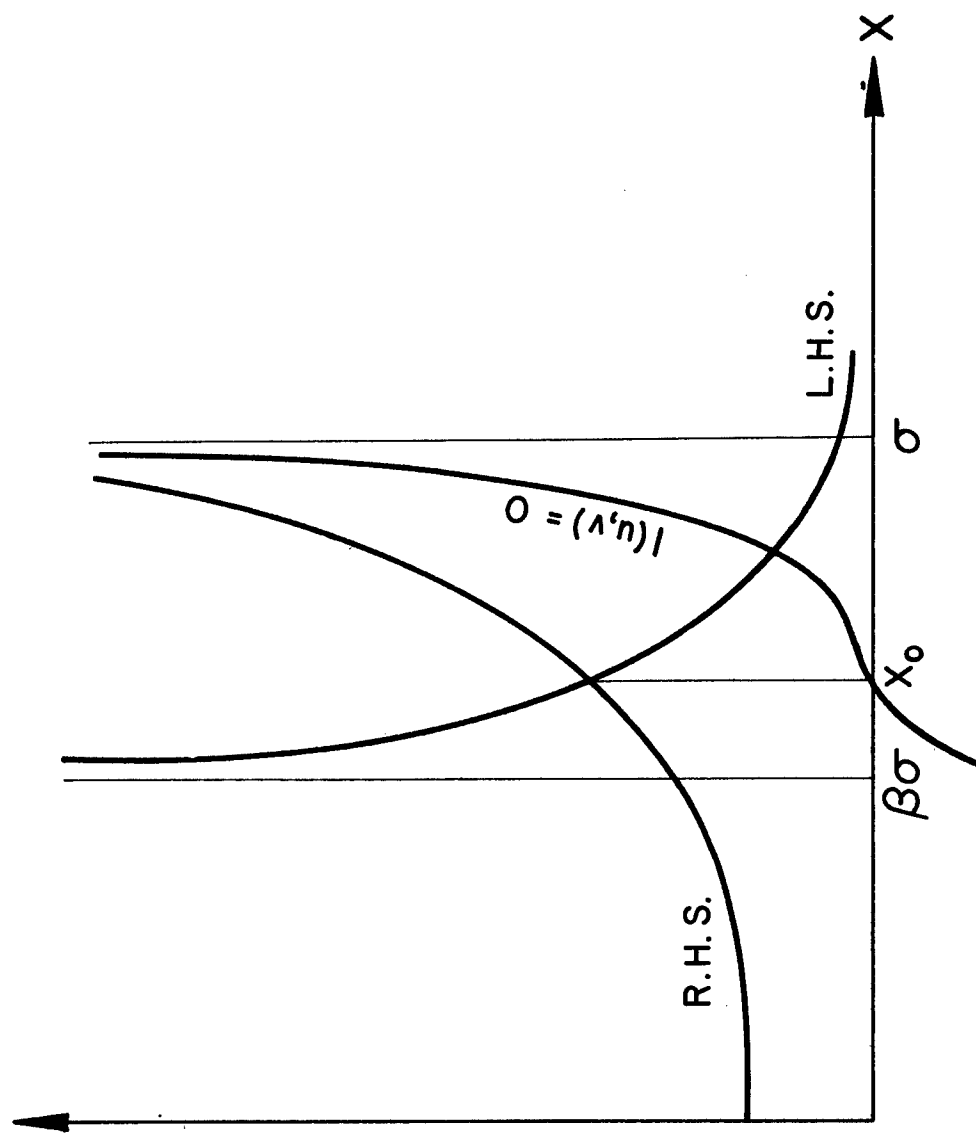


FIG. 2

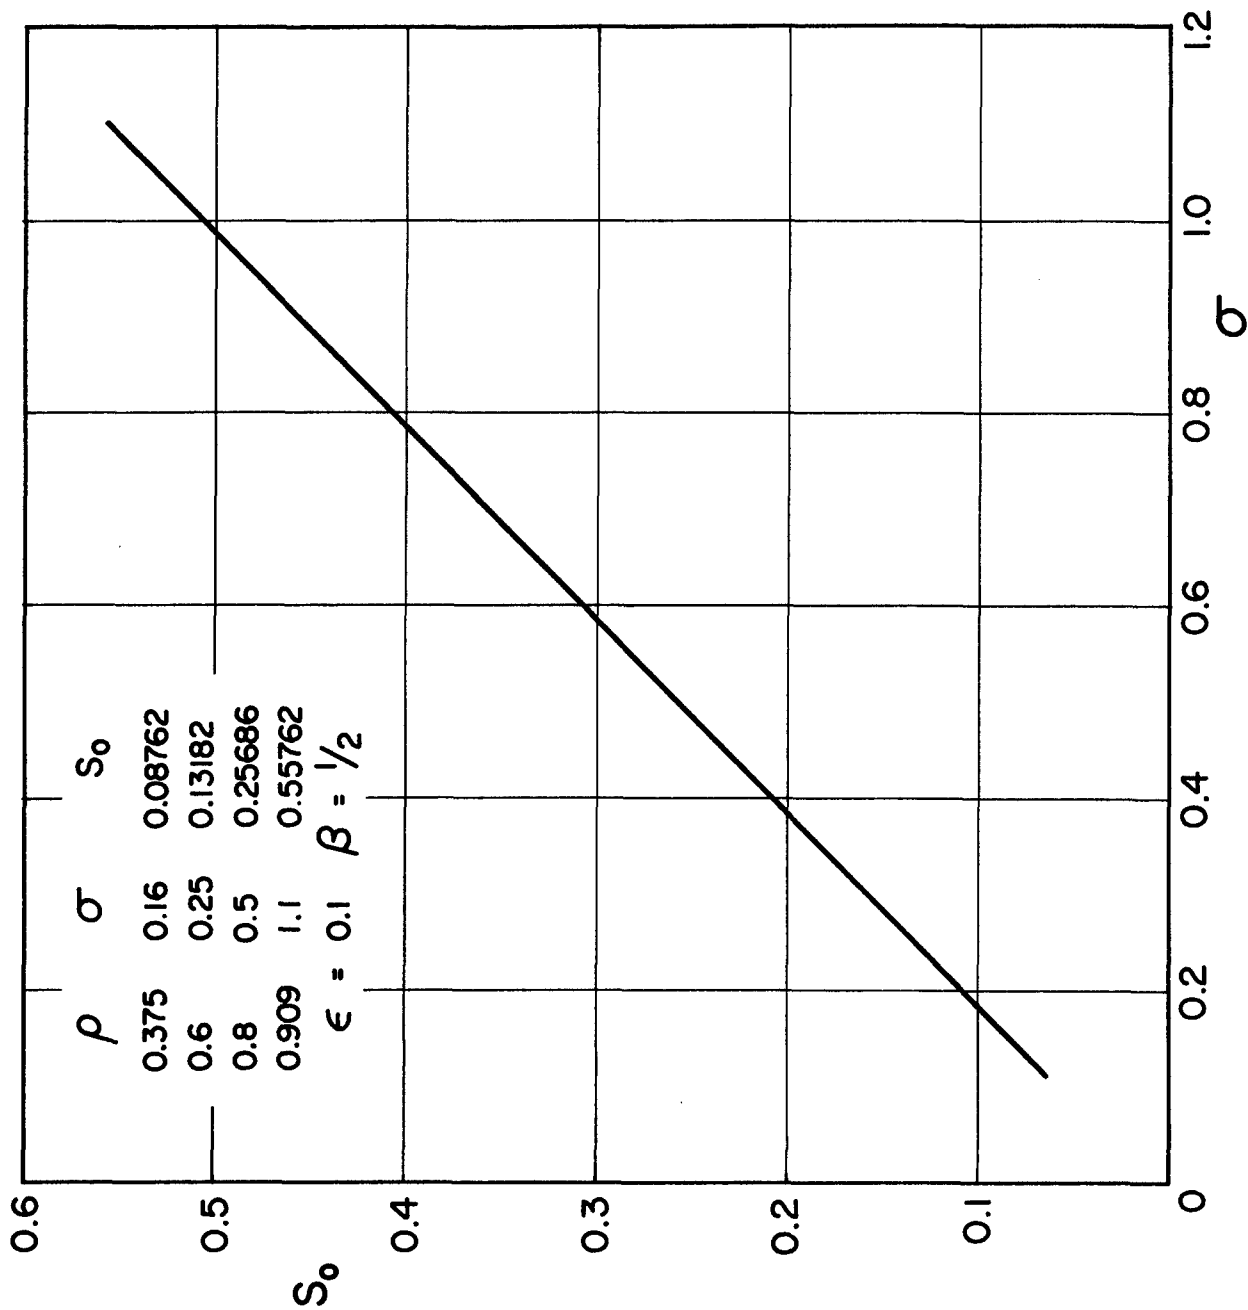


FIG. 3

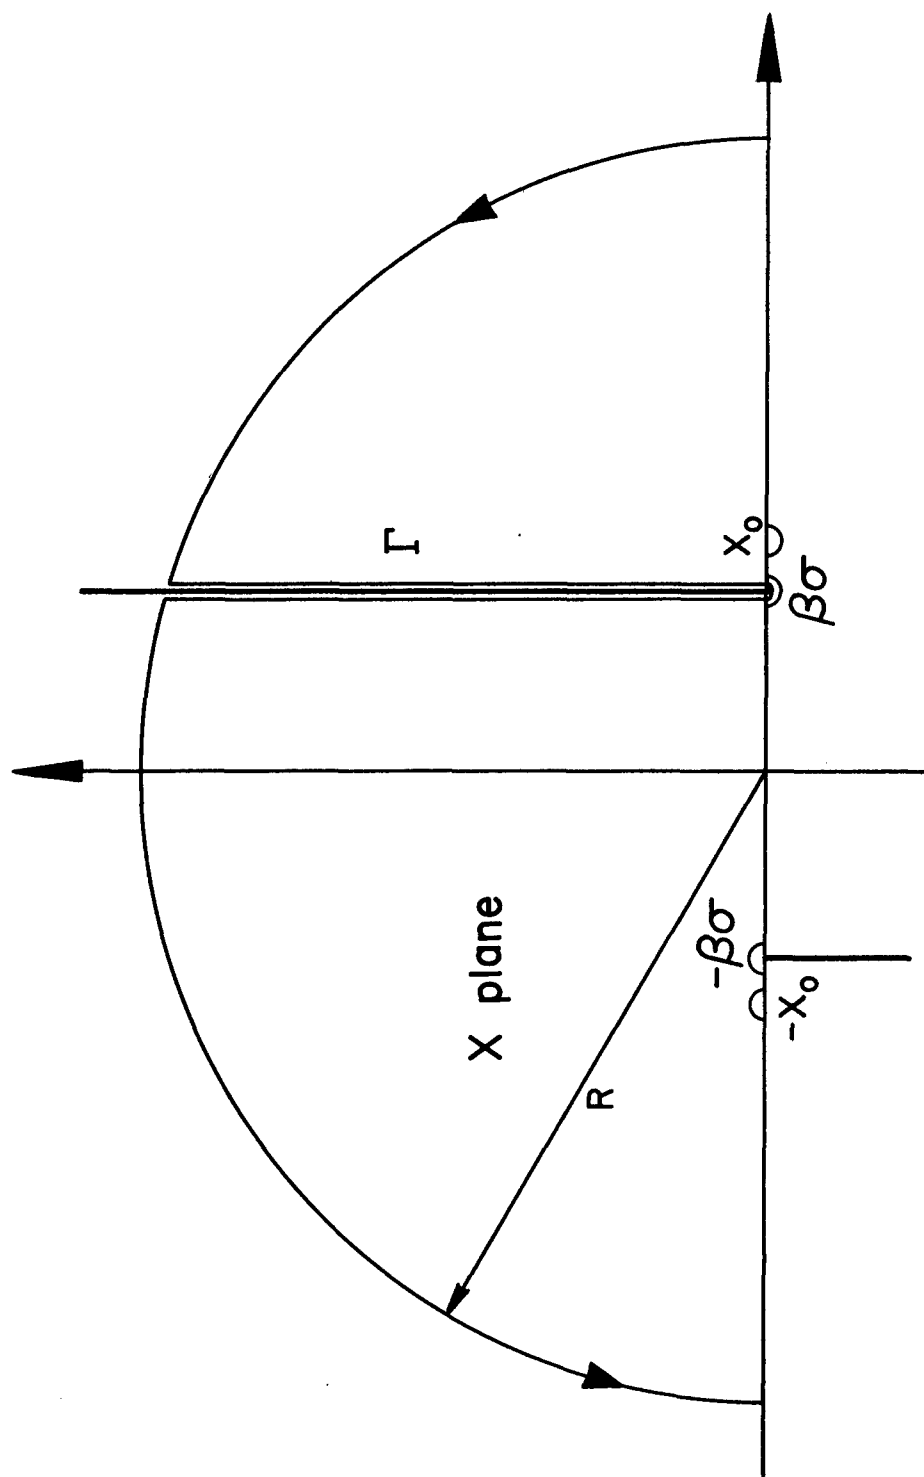


FIG. 4
PATH OF THE INTEGRATION IN THE X -PLANE

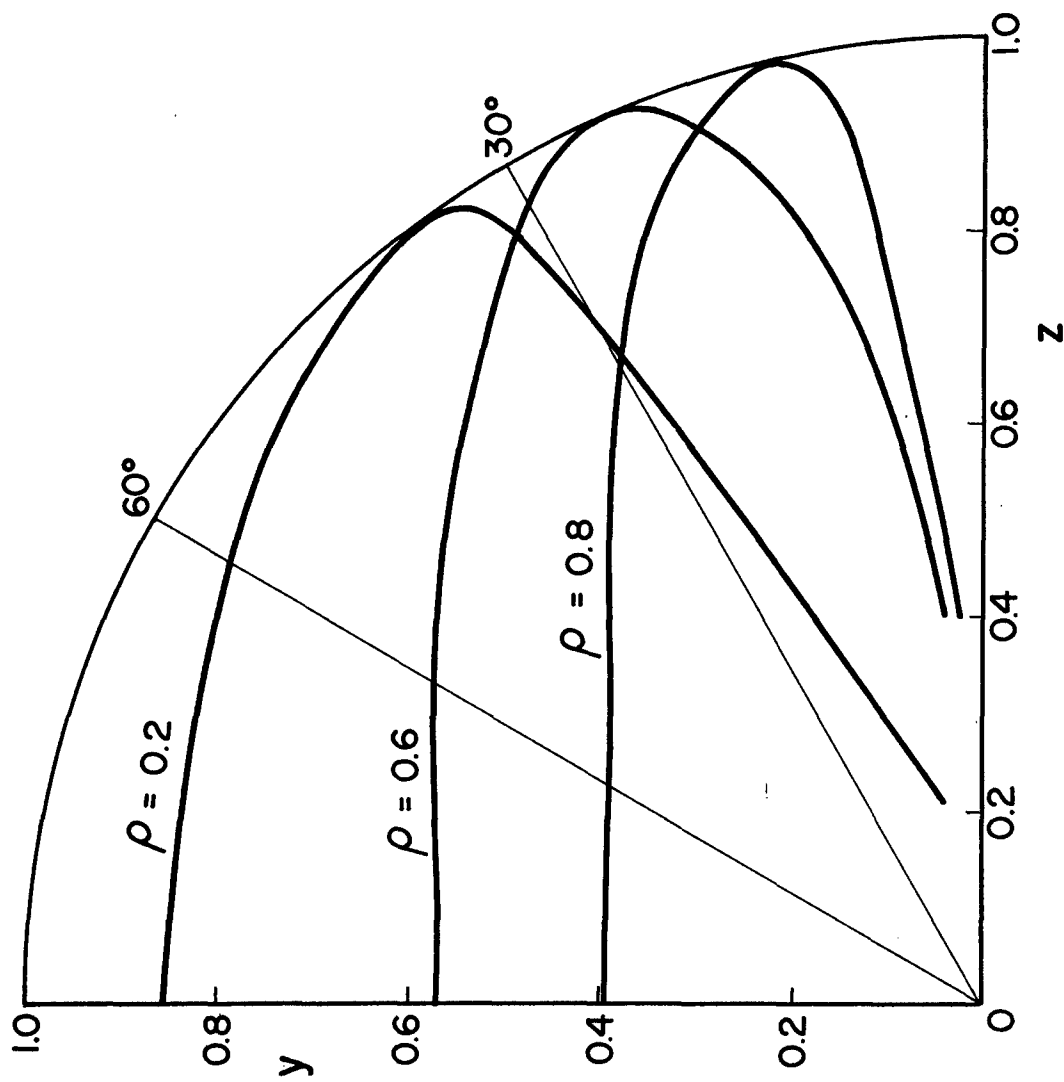


FIG. 5 NORMALIZED RADIATION PATTERN

$\frac{(H\phi)^2}{(H\phi)_{\max}^2}$ for different $\rho = \frac{b}{a}$, $\epsilon = \sigma(1-\rho)$, $\beta = \frac{1}{2}$

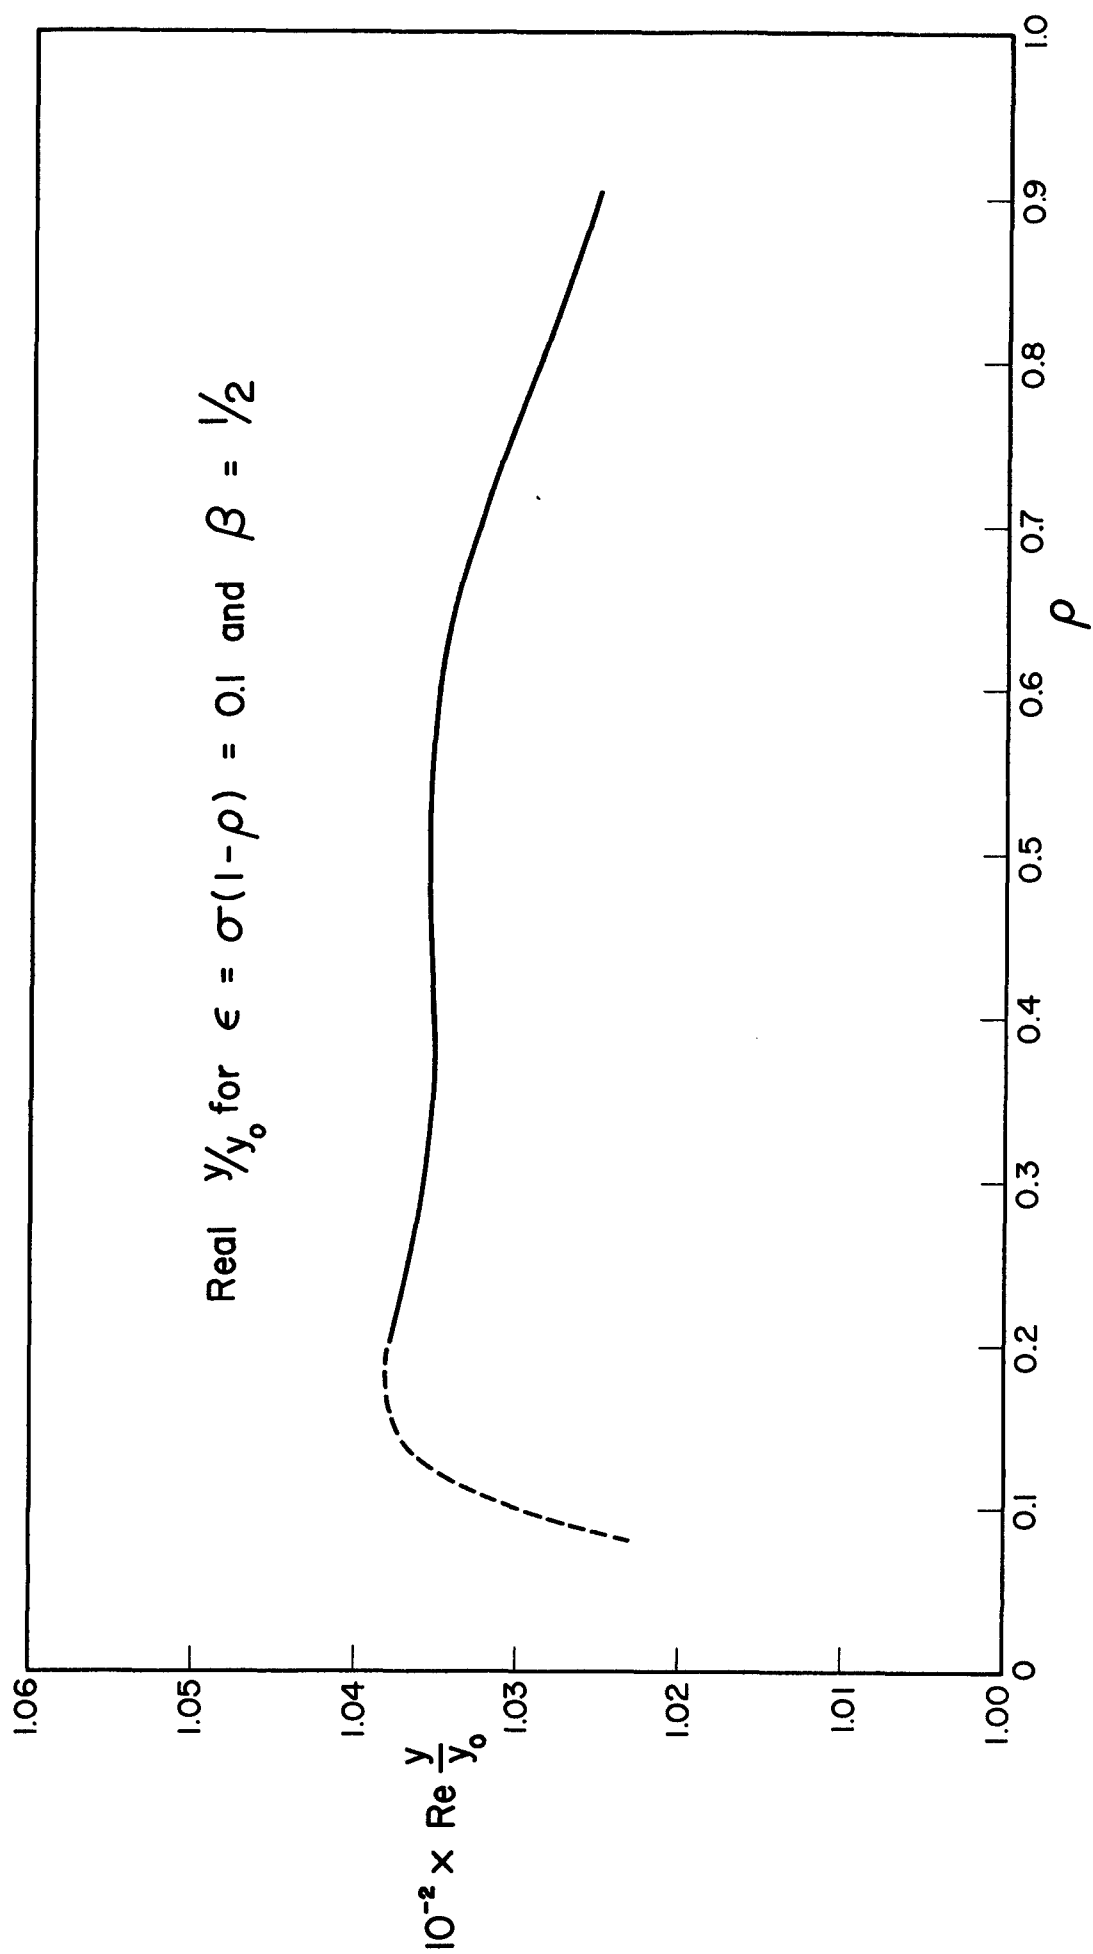


FIG. 6

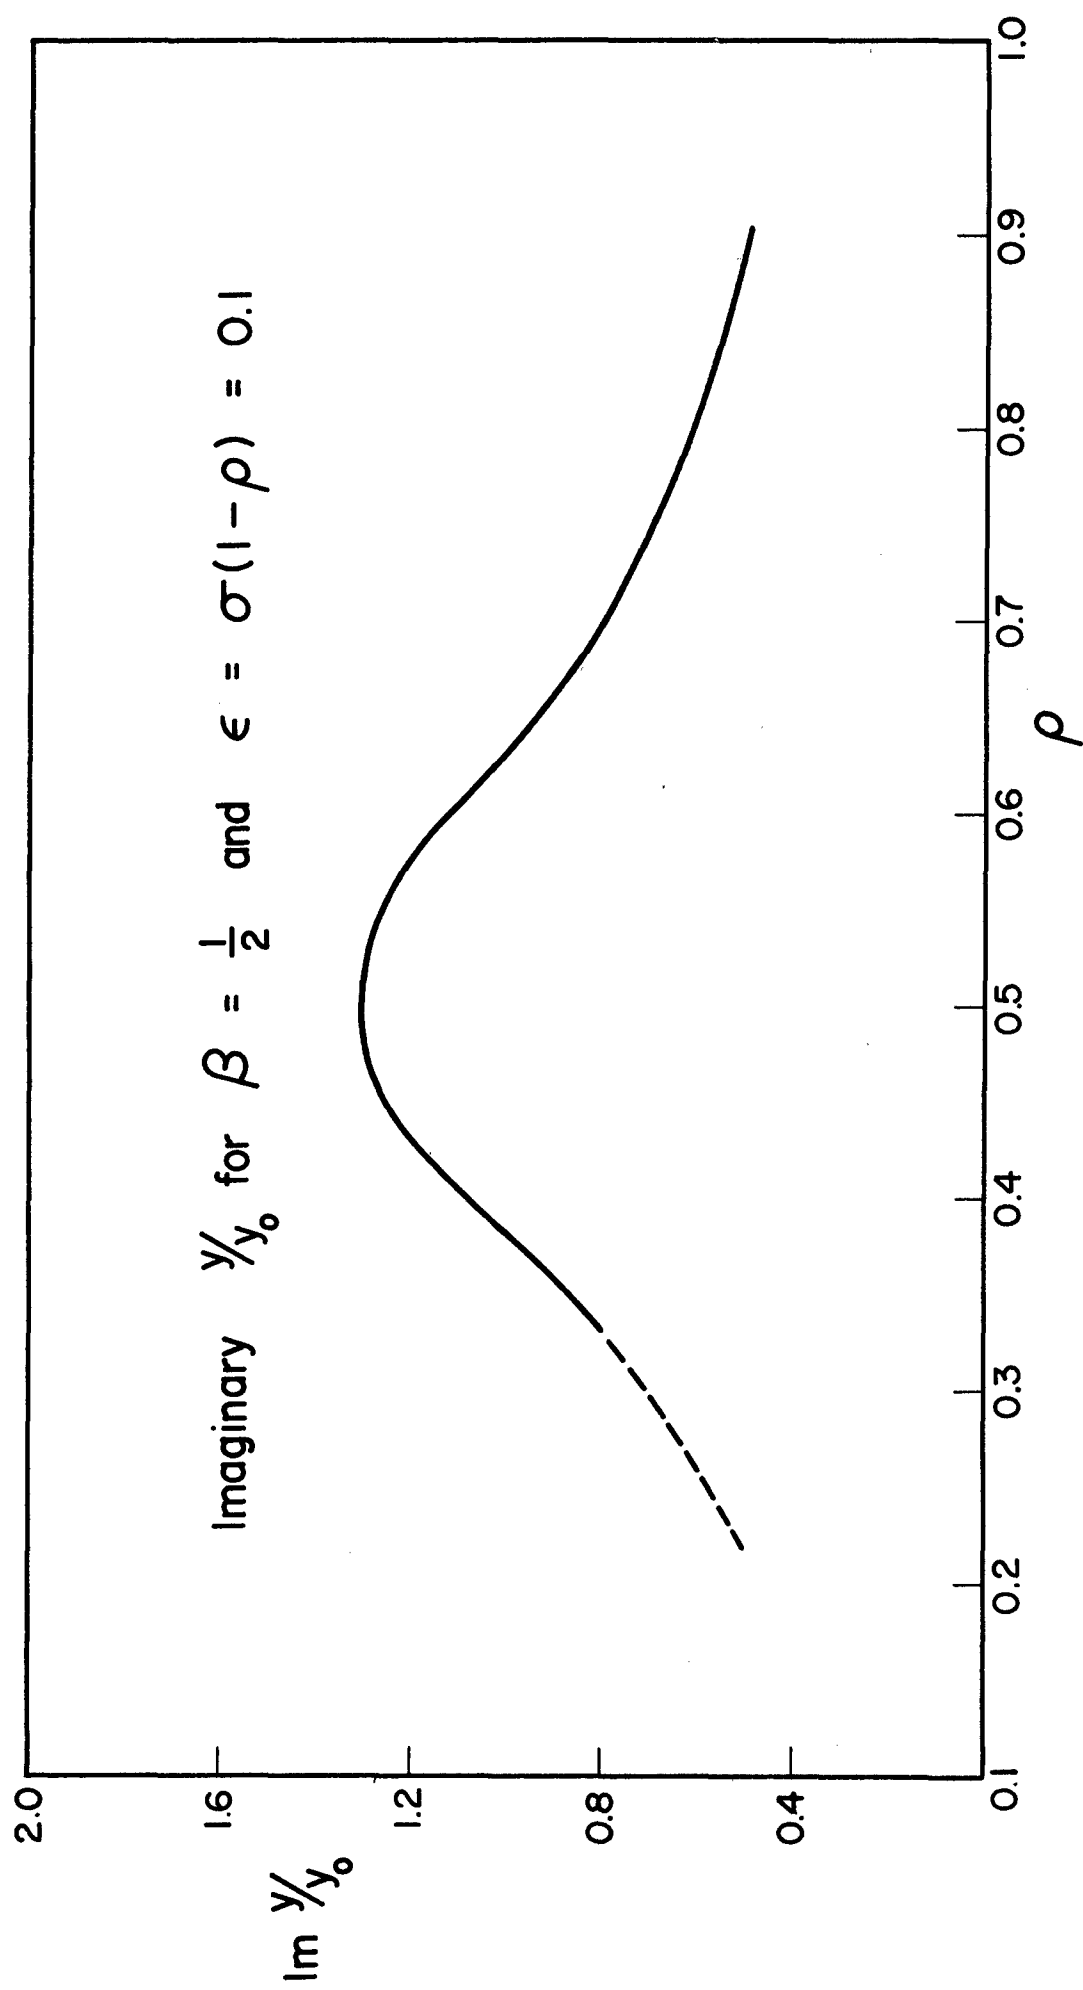


FIG. 7

LIST S-S

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
AF 29	APGC (PGTRI, Tech Library) Eglin AFB Florida	1
AF 124	RADC (RCOIL-2) Griffiss AFB New York	1
AF 139	AF Missile Dev. Cen. (MDGRT) Attn: Technical Library Holloman AFB New Mexico	1
AF 18	AUL Maxwell AFB Alabama	1
AF 5	AF Missile Test Cen. Patrick AFB Florida Attn: AFMTC, Tech Library, MU-135	1
AF 227	USAF Security Service (CLR) San Antonio, Texas	1
AF 28	Hq. USAF (Major R. L. Stell) Tactical Air Group Washington 25, D.C.	1
AF 91	AFOSR (SRY, Technical Director) 14th Street and Constitution Avenue Washington, D.C.	1
AF 166	Hq. USAF (AFOAC-S/E) Communications-Electronics Directorate Washington 25, D.C.	1
AF 314	Director of Air Force Research Division AFRD Washington, D.C.	1
AF 63	WADD (WCLRSA, Mr. Portune) Wright-Patterson AFB Ohio	

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
AF 43	ASD (ASAPRL) Wright-Patterson AFB Ohio	1
AF 68	ASD (ASRNRE-3) Attn: Mr. Paul Springer Wright-Patterson AFB Ohio	1
AF 231	Director, Electronics Division Air Technical Intelligence Center Attn: AFCIN-4EL, Colonel H. K. Gilbert Wright-Patterson AFB Ohio	1
AF 308	WADD (WWDRT, Mr. A. D. Clark) Directorate of System Engineering Dyna Soar Engineering Office Wright-Patterson AFB Ohio	1
Ar 42	Director U. S. Army Ordnance Ballistic Research Laboratories Aberdeen Proving Ground Maryland Attn: Ballistic Measurements Laboratory	1
Ar 47	Ballistic Research Laboratories Aberdeen Proving Ground Maryland Attn: Technical Information Branch	1
Ar 3	Director Evans Signal Laboratory Belmar, New Jersey Attn: Mr. O. C. Woodyard	1
Ar 5	U. S. Army Signal Engineering Laboratories Evans Signal Laboratory Belmar, New Jersey Attn: Technical Document Center	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
AF 253	EOARDC Shell Building 47 Rue Cantersteen Brussels, Belgium	1
Ar 78	Commanding General, SIGFM/EL-PC U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: Dr. Horst H. Kedesdy Deputy Chief, Chem-Physics Branch	1
Ar 49	Commanding General U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: SIGFM/EL-AT	1
Ar 39	Commander USASRDL Fort Monmouth, New Jersey Attn: Mr. F. J. Triola	1
Ar 67	Commander Army Rocket & Guided Missile Agency Redstone Arsenal Alabama Attn: Technical Library, ORDXR-OTL	4
Ar 9	Chief of Research & Development Department of the Army Washington 25, D.C. Attn: Scientific Information Branch	1
Ar 41	Office of Chief Signal Officer Engineering & Technical Division Washington 25, D.C. Attn: SIGNET-5	1
G 59	Advisory Group on Electric Parts Room 103, Moore School Building 200 South 33rd Street Philadelphia 4, Pennsylvania	1
G 2	ASTIA Arlington Hall Station Arlington 12, Virginia	10

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
G 103	National Aeronautical Space Agency Langley Aeronautical Research Laboratory Langley, Virginia Attn: Mr. Cliff Nelson	1
G 8	Library National Bureau of Standards Boulder Laboratories Boulder, Colorado	2
G 13	National Bureau of Standards U. S. Department of Commerce Washington 25, D. C. Attn: Mr. A. G. McNish	1
G 27	National Bureau of Standards U. S. Department of Commerce Washington 25, D.C. Attn: Gustave Shapiro, Chief Engineering Electronics Section Electricity and Electronics Division	1
G 49	Director National Security Agency Washington 25, D.C. Attn: R/D (331)	7
G 6	Office of Technical Services Department of Commerce Washington 25, D.C. Attn: Technical Reports Section	2
M 6	AFCRL, Office of Aerospace Research (CRREL) 10 L. G. Hanscom Field Bedford, Massachusetts	
M 17	AFCRL, Office of Aerospace Research (CRRD) 3 Attn: Carlyle J. Sletten L. G. Hanscom Field Bedford, Massachusetts	
	AFCRL, Office of Aerospace Research (CRRD) 2 Attn: Contract Files L. G. Hanscom Field Bedford, Massachusetts	

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
M 54	Hq. AFCCDD (CCRRC, Capt, John J. Hobson) L. G. Hanscom Field Bedford, Massachusetts	1
M 59	AFCCDD L. G. Hanscom Field Bedford, Massachusetts	1
G 116	NASA (Dr. R. V. Hess) NASA Langley Research Center Hampton, Virginia	1
N 1	Director, Avionics Division (AV) Bureau of Aeronautics Department of the Navy Washington 25, D.C.	1
N 16	Commander U. S. Naval Air Missile Test Center Point Mugu, California Attn: Code 366	1
N 27	Librarian U. S. Naval Postgraduate School Monterey, California	1
N 29	Director U. S. Naval Research Laboratory Washington 25, D.C. Attn: Code 2027	2
N 30	Dr. J. I. Bohnert, Code 5210 U. S. Naval Research Laboratory Washington 25, D.C.	1
N 37	Chief of Naval Research Department of the Navy Washington 25, D.C. Attn: Code 427	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
N 48	Commanding Officer U. S. Naval Air Development Center Johnsville, Pennsylvania Attn: NADC Library	1
N 85	Commanding Officer and Director U. S. Navy Electronics Laboratory (Library) San Diego 52, California	1
N 86	Chief, Bureau of Ordnance Department of the Navy Surface Guided Missile Branch Washington 25, D.C. Attn: Code ReSl-e	1
N 88	Department of the Navy Bureau of Aeronautics Technical Data Division, Code 4106 Washington 25, D.C.	1
N 91	Commander U. S. Naval Air Test Center Patuxent River, Maryland Attn: ET-315, Antenna Branch	1
N 141	ARDC Regional Office c/o Department of the Navy Room 4549, Munitions Building Washington 25, D.C.	1
N 73	Office of Naval Research Branch Office, London Navy 100, Box 39 F. P. O. New York, New York	10
I 1	Airborne Instruments Laboratory, Inc. Division of Cutler Hammer Walt Whitman Road Melville, L. I. New York Attn: Library	1
I 388	Aircom Inc. 354 Main Street Winthrop, Massachusetts	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 374	ACF Industries, Inc. Southeast Corner, 52nd Avenue and Jackson Street Bladensburg, Prince George's County Maryland Attn: Librarian	1
I 205	Battelle Memorial Institute 505 King Avenue Columbus 1, Ohio Attn: Wayne E. Rife, Project Leader Electrical Engineering Division	1
I 8	Bell Aircraft Corporation Post Office Box One Buffalo 5, New York Attn: Eunice P. Hazelton, Librarian	1
I 469	Bell Telephone Laboratories Murray Hill New Jersey	1
I 13	Bell Telephone Laboratories, Inc. Whippany Laboratory Whippany, New Jersey Attn: Technical Information Library	1
I 940	Aerospace Corp. Box 95085 Los Angeles 45, California Attn: Library	1
I 247	Bendix Radio Division Bendix Aviation Corporation E. Joppa Road Towson 4, Maryland Attn: Dr. D. M. Allison, Jr. Director Engineering & Research	1
I 248	Bjorksten Research Laboratories, Inc. P. O. Box 265 Madison, Wisconsin Attn: Librarian	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 249	Boeing Airplane Company Pilotless Aircraft Division P. O. Box 3707 Seattle 24, Washington Attn: R. R. Barber, Library Supervisor	2
I 892	Boeing Airplane Company 7755 East Marginal Way Seattle 24, Washington Attn: Mr. D. L. Scidmore	1
I 253	Chance Vought Aircraft, Inc. 9314 West Jefferson Street Dallas, Texas Attn: A. D. Pattullo, Librarian	1
I 470	Chu Associates P. O. Box 387 Whitcomb Avenue Littleton, Massachusetts	1
I 918	Collins Radio Company 855 35th Street, N.E. Cedar Rapids, Iowa Attn: Dr. R. L. McCreary	1
I 919	Collins Radio Company 1200 North Alma Road Richardson, Texas Attn: C. D. Tipton	1
I 126	Convair, A Division of General Dynamics Corp. Fort Worth, Texas Attn: K. G. Brown Division Research Librarian	1
I 254	Convair, A Division of General Dynamics Corp. 2165 Pacific Highway San Diego 12, California Attn: Mrs. Dora B. Burke Engineering Librarian	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 25	Cornell Aeronautical Laboratory, Inc. 4455 Genesee Street Buffalo 21, New York Attn: Librarian	1
I 255	Dalmo Victor Company A Division of Textron, Inc. 1515 Industrial Way Belmont, California Attn: Mary Ellen Addems, Technical Librarian	1
I 28	Dorne and Margolin, Inc. 29 New York Avenue Westbury, Long Island, New York	1
I 257	Douglas Aircraft Co., Inc. 827 Lapham Street El Segundo, California Attn: Engineering Library	1
I 258	Douglas Aircraft Company, Inc. 3000 Ocean Park Boulevard Santa Monica, California Attn: Peter Duyan, Jr. Chief, Electrical/Electronics Section	1
I 259	Douglas Aircraft Company, Inc. 2000 North Memorial Drive Tulsa, Oklahoma Attn: Engineering Librarian, D-250	1
I 187	Electromagnetic Research Corporation 5001 College Avenue College Park, Maryland Attn: Mr. Martin Katzin	1
I 415	Electronica Communication 1830 York Road Timonium, Maryland	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 299	Electronic Specialty Company 5121 San Fernando Road Los Angeles 39, California Attn: Donald L. Margerum Chief Engineer, Radiating Systems Division	1
I 262	Emerson Electric Mfg. Co. 8100 West Florissant Avenue St. Louis 21, Missouri Attn: Mr. E. R. Breslin, Librarian	1
I 147	Emerson Radio-Phonograph Corp. Emerson Research Laboratories 701 Lamont Street, N.W. Washington 10, D.C. Attn: Mrs. R. Corbin, Librarian	1
I 264	Fairchild Aircraft-Missiles Division Fairchild Eng. and Airplane Corp. Hagerstown, Maryland Attn: Library	1
I 266	Federal Telecommunication Laboratories 500 Washington Avenue Nutley 10, New Jersey Attn: Technical Library	1
I 269	General Electric Company Electronics Park Syrcause, New York Attn: Documents Library B. Fletcher, Building 3-143A	1
I 793	General Electric Company Missile and Space Vehicle Department 3198 Chestnut Street Philadelphia, Pennsylvania Attn: Documents Library	1
I 893	General Electric Company 3750 D Street Philadelphia 24, Pennsylvania Attn: Mr. H. G. Lew Missile and Space Vehicle Department	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 270	General Precision Laboratory, Inc. 63 Bedford Road Pleasantville, New York Attn: Librarian	1
I 48	Goodyear Aircraft Corp. 1210 Massillon Road Akron 15, Ohio Attn: Library, Plant G	1
I 448	Granger Associates Electronic Systems 974 Commercial Street Palo Alto, California Attn: John V. N. Granger, President	1
I 737-	The Hallicrafters Co. 5th and Kostner Avenues Chicago 24, Illinois Attn: Henri Hodara, Head of Space Communication	1
I 207	Hughes Aircraft Company Antenna Department Building 12, Mail Station 2714 Culver City, California Attn: Dr. W. H. Kummer	1
I 56	Hughes Aircraft Company Florence Ave. and Teale Streets Culver City, California Attn: Louis L. Bailin Manager, Antenna Department	1
I 265	ITT Laboratories 3700 East Pontiac Street Fort Wayne 1, Indiana Attn: Technical Library	1
I 230	Jansky and Bailey, Inc. 1339 Wisconsin Avenue, N.W. Washington 7, D.C. Attn: Mr. Delmer C. Ports	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 241	Dr. Henry Jasik, Consulting Engineer 298 Shames Drive Brush Hollow Industrial Park Westbury, New York	1
I 279	Lockheed Aircraft Corporation 2555 N. Hollywood Way California Division Engineering Library Department 72-25, Plant A-1, Building 63-1 Burbank, California Attn: N. C. Harnois	1
I 468	Lockheed Aircraft Corporation Missile Systems Division Research Library Box 504, Sunnyvale, California Attn: Miss Eva Lou Robertson, Chief Librarian	1
I 136	The Martin Company P. O. Box 179 Denver 1, Colorado Attn: Mr. Jack McCormick	1
I 280	The Martin Company Baltimore 3, Maryland Attn: Engineering Library Antenna Design Group	1
I 282	McDonnell Aircraft Corporation, Dept. 664 Box 516 St. Louis 66, Missouri Attn: C. E. Zoller Engineering Library	1
I 116	Melpar, Inc. 3000 Arlington Boulevard Falls Church, Virginia Attn: Engineering Technical Library	1
I 648	The Mitre Corporation 244 Wood Street Lexington 73, Massachusetts Attn: Mrs. Jean E. Claflin, Librarian	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 934	Motorola, Inc. Phoenix Research Laboratory 3102 N. 56th Street Phoenix, Arizona Attn: Dr. A. L. Aden	1
I 641	National Research Council Radio & Electrical Engineering Division Ottawa, Ontario, Canada Attn: Dr. G. A. Miller, Head Microwave Section	1
I 284	North American Aviation, Inc. 12214 Lakewood Boulevard Downey, California Attn: Technical Information Center (495-12) Space and Information Systems Division	1
I 285	North American Aviation, Inc. Los Angeles International Airport Los Angeles 45, California Attn: Engineering Technical File	1
I 82	Northrop Corporation Norair Division 1001 E. Broadway Hawthorne, California Attn: Mr. E. A. Freitas, Library Dept. 3145	1
I 286	Page Communications Engineers, Inc. 2001 Wisconsin Avenue, N.W. Washington 7, D.C. Attn: (Mrs.) Ruth Temple, Librarian	1
I 287	Philco Corporation C and Tioga Streets Philadelphia 34, Pennsylvania Attn: Mrs. Dorothy B. Collins Research Librarian	1
I 225	Pickard and Burns, Inc. 240 Highland Avenue Needham 94, Massachusetts Attn: Dr. Richard H. Woodward	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 288	Polytechnic Research & Development Co. Inc. 202 Tillary Street Brooklyn 1, New York Attn: Technical Library	1
I 232	Radiation Engineering Laboratory Main Street Maynard, Massachusetts Attn: Dr. John Ruze	1
I 289	Radiation, Inc. P. O. Drawer 37 Melbourne, Florida Attn: Technical Library, Mr. M. L. Cox	1
I 914	Radiation Systems, Inc. 440 Swann Avenue Alexandria, Virginia Attn: Library	1
I 290	RCA Laboratories David Sarnoff Research Center Princeton, New Jersey Attn: Miss Fern Cloak, Librarian	1
I 291	Radio Corporation of America Defense Electronic Products Building 10, Floor 7 Camden 2, New Jersey Attn: Mr. Harold J. Schrader, Staff Engineer Organization of Chief Technical Administrator	1
I 757	Radio Corporation of America Surface Communications Systems Laboratory 75 Varick Street New York 13, New York Attn: Mr. S. Krevsky	1
I 789	Radio Corporation of America West Coast Missile and Surface Radar Division Engineering Library, Building 306/2 Attn: L. R. Hund, Librarian 8500 Balboa Boulevard Van Nuys, California	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 930	Radio Corporation of America Defense Electronic Products Advanced Military Systems Princeton, New Jersey Attn: Mr. David Shore	1
I 292	Director, USAF Project RAND Via: AF Liaison Office The Rand Corporation 1700 Main Street Santa Monica, California	1
I 547	The Rand Corporation 1700 Main Street Santa Monica, California Attn: Technical Library	1
I 373	Rantec Corporation 23999 Ventura Boulevard Calabasas, California Attn: Grace Keener, Office Manager	1
I 294	Raytheon Company Wayland Laboratory Wayland, Massachusetts Attn: Miss Alice G. Anderson, Librarian	1
I 472	Raytheon Company Missile Systems Division Hartwell Road Bedford, Massachusetts Attn: Donald H. Archer	1
I 295	Republic Aviation Corporation Farmingdale, Long Island, New York Attn: Engineering Library	1
I 142	Sanders Associates, Inc. 95 Canal Street Nashua, New Hampshire Attn: Mr. Norman R. Wild	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 96	Sandia Corporation, Sandia Base P. O. Box 5800 Albuquerque, New Mexico Attn: Classified Document Division	1
I 546	Sandia Corporation Attn: Organization 1423 Sandia Base Albuquerque, New Mexico	1
I 682	Scanwell Laboratories, Inc. 6601 Scanwell Lane Springfield, Virginia	1
I 312	Space Technology Laboratories, Inc. P. O. Box 95001 Los Angeles 45, California Attn: Technical Information Center Document Procurement	1
I 297	Sperry Gyroscope Company Great Neck, Long Island, New York Attn: Florence W. Turnbull Engineering Librarian	1
I 367	Stanford Research Institute Documents Center Menlo Park, California Attn: Acquisitions	1
I 104	Sylvania Electric Products, Inc. 100 First Avenue Waltham 54, Massachusetts Attn: Charles A. Thornhill, Report Librarian Waltham Laboratories Library	1
I 818	Sylvania Reconnaissance Systems Lab. Box 188 Mountain View, California Attn: Marvin D. Waldman	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 240	TRG, Inc. 2 Aerial Way Syosset, New York Attn: M. L. Henderson, Librarian	1
I 338	A. S. Thomas, Inc. 355 Providence Highway Westwood, Massachusetts Attn: A. S. Thomas, President	1
I 708	Texas Instruments, Inc. 6000 Lemmon Avenue Dallas 9, Texas Attn: John B. Travis Systems Planning Branch	1
I 139	Westinghouse Electric Corp. Electronics Division Friendship Int'l Airport Box 1897 Baltimore 3, Maryland Attn: Engineering Library	1
U 61	Brown University Department of Electrical Engineering Providence, Rhode Island Attn: Dr. C. M. Angulo	1
U 157	California Institute of Technology Jet Propulsion Laboratory 4800 Oak Grove Drive Pasadena, California Attn: Mr. I. E. Newlan	1
U 99	California Institute of Technology 1201 E. California Street Pasadena, California Attn: Dr. C. Papas	1
U 3	Space Sciences Laboratory Leuschner Observatory University of California Berkeley 4, California Attn: Dr. Samuel Silver, Professor of Engineering Science and Director, Space Sciences Laboratory	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 100	University of California Electronics Research Lab. 332 Cory Hall Berkeley 4, California Attn: J. R. Whinnery	1
U 289	University of Southern California University Park Los Angeles, California Attn: Dr. Raymond L. Chuan Director, Engineering Center	1
U 239	Case Institute of Technology Electrical Engineering Department 10900 Euclid Avenue Cleveland, Ohio Attn: Professor Robert Plonsey	1
U 183	Columbia University Department of Electrical Engineering Morningside Heights, New York, New York Attn: Dr. Schlesinger	1
U 238	University of Southern California University Park Los Angeles 7, California Attn: Z. A. Kaprielian Associate Professor of Electrical Engineering	1
U 10	Cornell University School of Electrical Engineering Ithaca, New York Attn: Professor G. C. Dalman	1
U 86	University of Florida Department of Electrical Engineering Gainesville, Florida Attn: Professor M. H. Latour, Library	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 59	Library Georgia Technology Research Institute Engineering Experiment Station 722 Cherry Street, N.W. Atlanta, Georgia Attn: Mrs. J. H. Crosland, Librarian	1
U 102	Harvard University Technical Reports Collection Gordon McKay Library 303 Pierce Hall Oxford Street Cambridge 38, Massachusetts Attn: Librarian	1
U 103	University of Illinois Documents Division Library Urbana, Illinois	1
U 104	University of Illinois College of Engineering Urbana, Illinois Attn: Dr. P. E. Mayes, Department of Electrical Engineering	1
U 169	Illinois Institute of Technology 3301 S. Dearborn Street Chicago 16, Illinois Attn: Dr. George I. Cohn	1
U 240	Illinois Institute of Technology Technology Center Department of Electrical Engineering Chicago 16, Illinois Attn: Paul C. Yuen Electronics Research Laboratory	1
U 22	The John Hopkins University Homewood Campus Baltimore 18, Maryland Attn: Dr. Donald E. Kerr Department of Physics	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 105	The John Hopkins University Applied Physics Laboratory 8621 Georgia Avenue Silver Spring, Maryland Attn: Mr. George L. Seielstad	1
U 228	University of Kansas Electrical Engineering Department Lawrence, Kansas Attn: Dr. H. Unz	1
U 68	Lowell Technological Institute Research Foundation P. O. Box 709 Lowell, Massachusetts Attn: Dr. Charles R. Mingins	1
U 32	Massachusetts Institute of Technology Research Laboratory of Electronics Building 26, Room 327 Cambridge 39, Massachusetts Attn: John H. Hewitt	1
U 26	Massachusetts Institute of Technology Lincoln Laboratory P. O. Box 73 Lexington 73, Massachusetts Attn: Mary A. Granese, Librarian	1
U 34	McGill University Montreal, Canada Attn: Professor G. A. Woonton Director, The Eaton Electronics Research Laboratory	1
U 107	University of Michigan Electronic Defense Group Engineering Research Institute Ann Arbor, Michigan Attn: J. A. Boyd, Supervisor	1
U 37	University of Michigan Engineering Research Institute Willow Run Laboratories, Willow Run Airport Ypsilanti, Michigan Attn: Librarian	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 108	University of Minnesota Minneapolis 14, Minnesota Attn: Mr. Robert H. Stumm, Library	1
U 194	Physical Science Laboratory New Mexico College of Agriculture and Mechanic Arts State College, New Mexico Attn: Mr. H. W. Haas	1
U 39	New York University Institute of Mathematical Sciences Room 802, 25 Waverly Place New York 3, New York Attn: Professor Morris Kline	1
U 96	Northwestern University Microwave Laboratories Evanston, Illinois Attn: R. E. Beam	1
U 78	Ohio State University Research Foundation 1314 Kinnear Road Columbus 8, Ohio Attn: Dr. T. E. Tice Department of Electrical Engineering	1
U 109	The University of Oklahoma Research Institute Norman, Oklahoma Attn: Professor C. L. Farrar, Chairman Electrical Engineering	1
U 45	The Pennsylvania State University Department of Electrical Engineering University Park, Pennsylvania	1
U 185	University of Pennsylvania Institute of Cooperative Research 3400 Walnut Street Philadelphia, Pennsylvania Attn: Department of Electrical Engineering	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 48	Polytechnic Institute of Brooklyn Microwave Research Institute 55 Johnson Street Brooklyn, New York Attn: Dr. Arthur A. Oliner	1
U 97	Polytechnic Institute of Brooklyn Microwave Research Institute 55 Johnson Street Brooklyn, New York Attn: Mr. A. E. Laemmel	1
U 184	Purdue University Department of Electrical Engineering Lafayette, Indiana Attn: Dr. Schultz	1
U 176	Stanford University W. W. Hasen Laboratory of Physics Stanford, California Attn: Microwave Library	1
U 110	Syracuse University Research Institute Collendale Campus Syracuse 10, New York Attn: Dr. C. S. Grove, Jr. Director of Engineering Research	1
U 309	Technical University Oestervoldgade 10 G Copenhagen, Denmark Attn: Professor Hans Lottrup Knudsen	1
U 186	University of Tennessee Ferris Hall W. Cumberland Avenue Knoxville 16, Tennessee	1
U 111	The University of Texas Electrical Engineering Research Lab. P. O. Box 8026 University Station Austin 12, Texas Attn: Mr. John R. Gerhardt, Assistant Director	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 51	The University of Texas Defense Research Laboratory Austin, Texas Attn: Claude W. Horton, Physics Library	1
U 132	University of Toronto Department of Electrical Engr. Toronto, Canada Attn: Professor G. Sinclair	1
U 133	University of Washington Department of Electrical Engineering Seattle 5, Washington Attn: G. Held, Associate Professor	1
U 187	University of Wisconsin Department of Electrical Engineering Madison, Wisconsin Attn: Dr. Scheibe	1